

FIG. 1

FIG. 2 is a flowchart illustrating the process of initializing a probe utility application and performing maintenance polling.

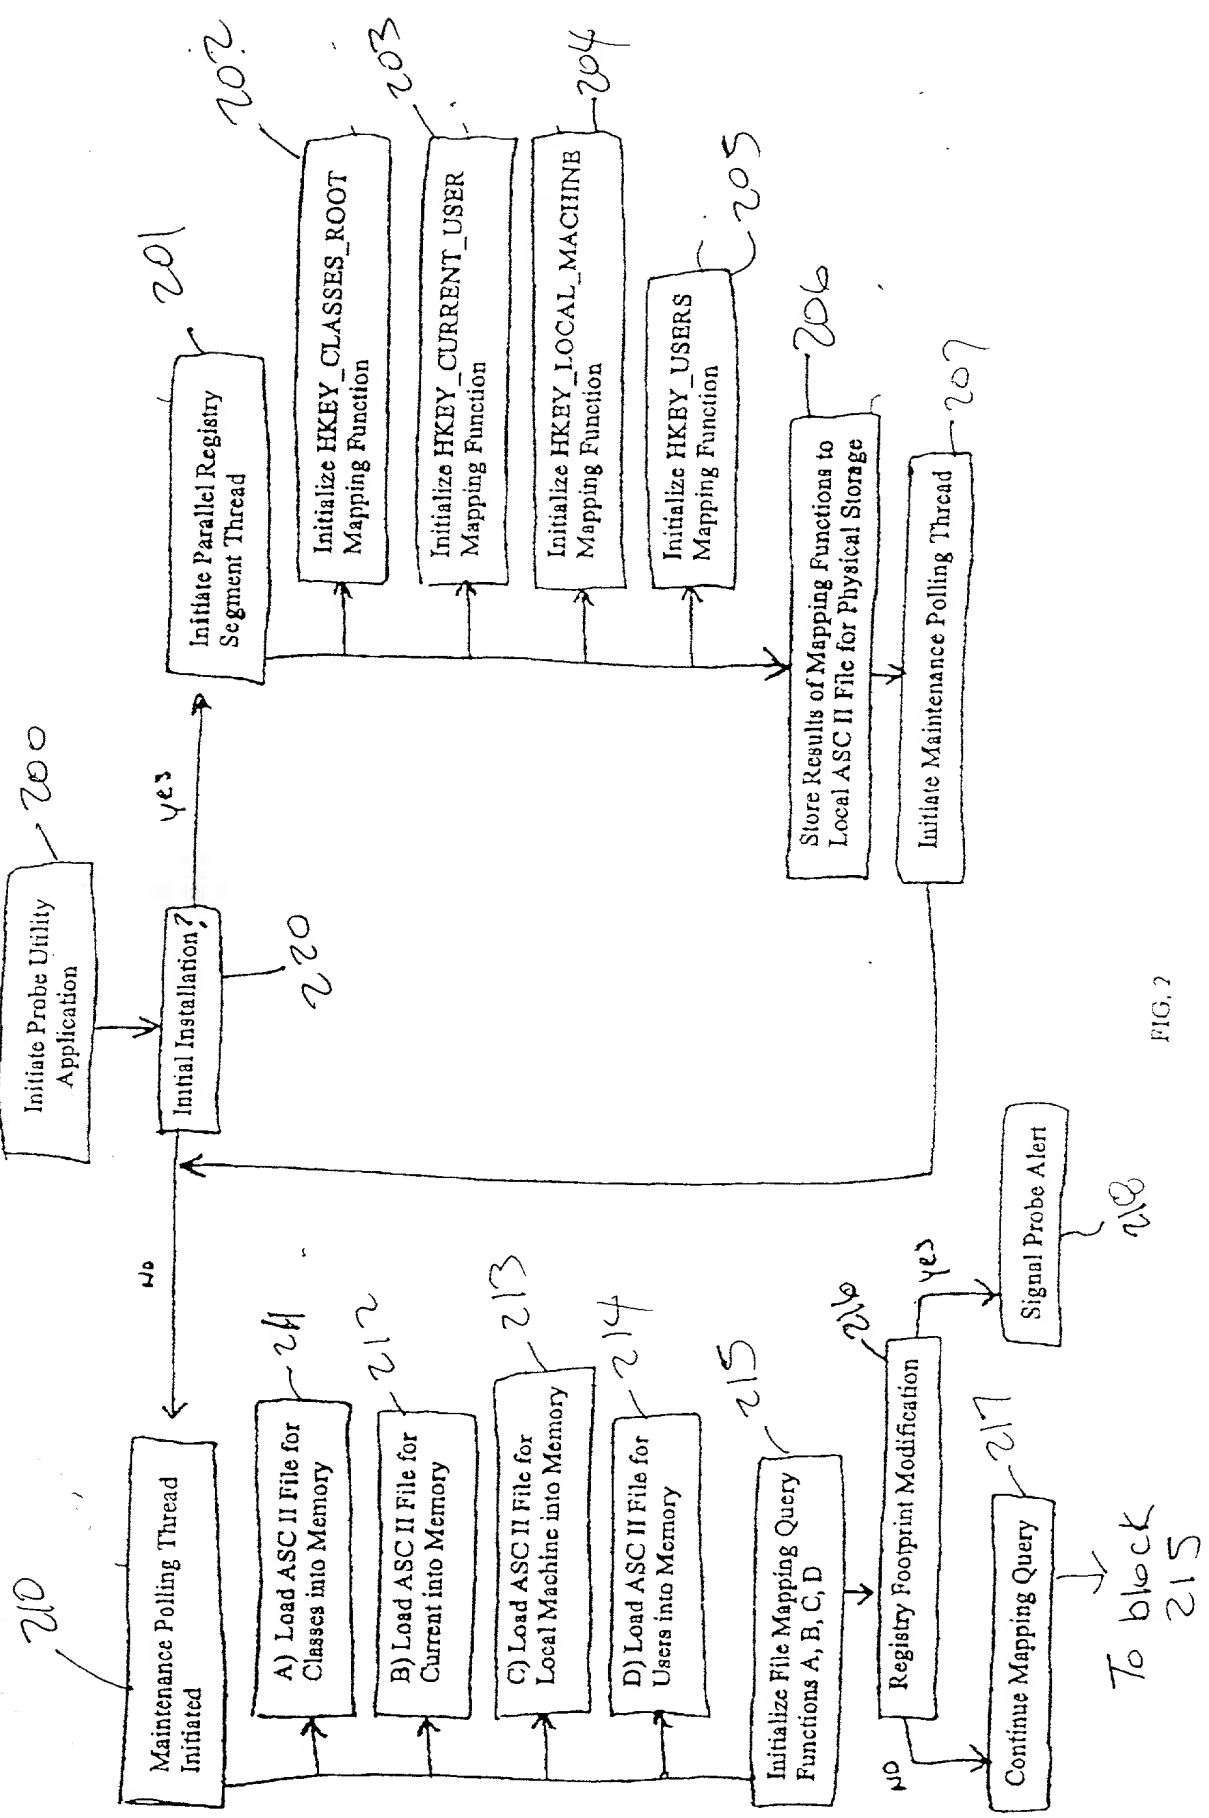
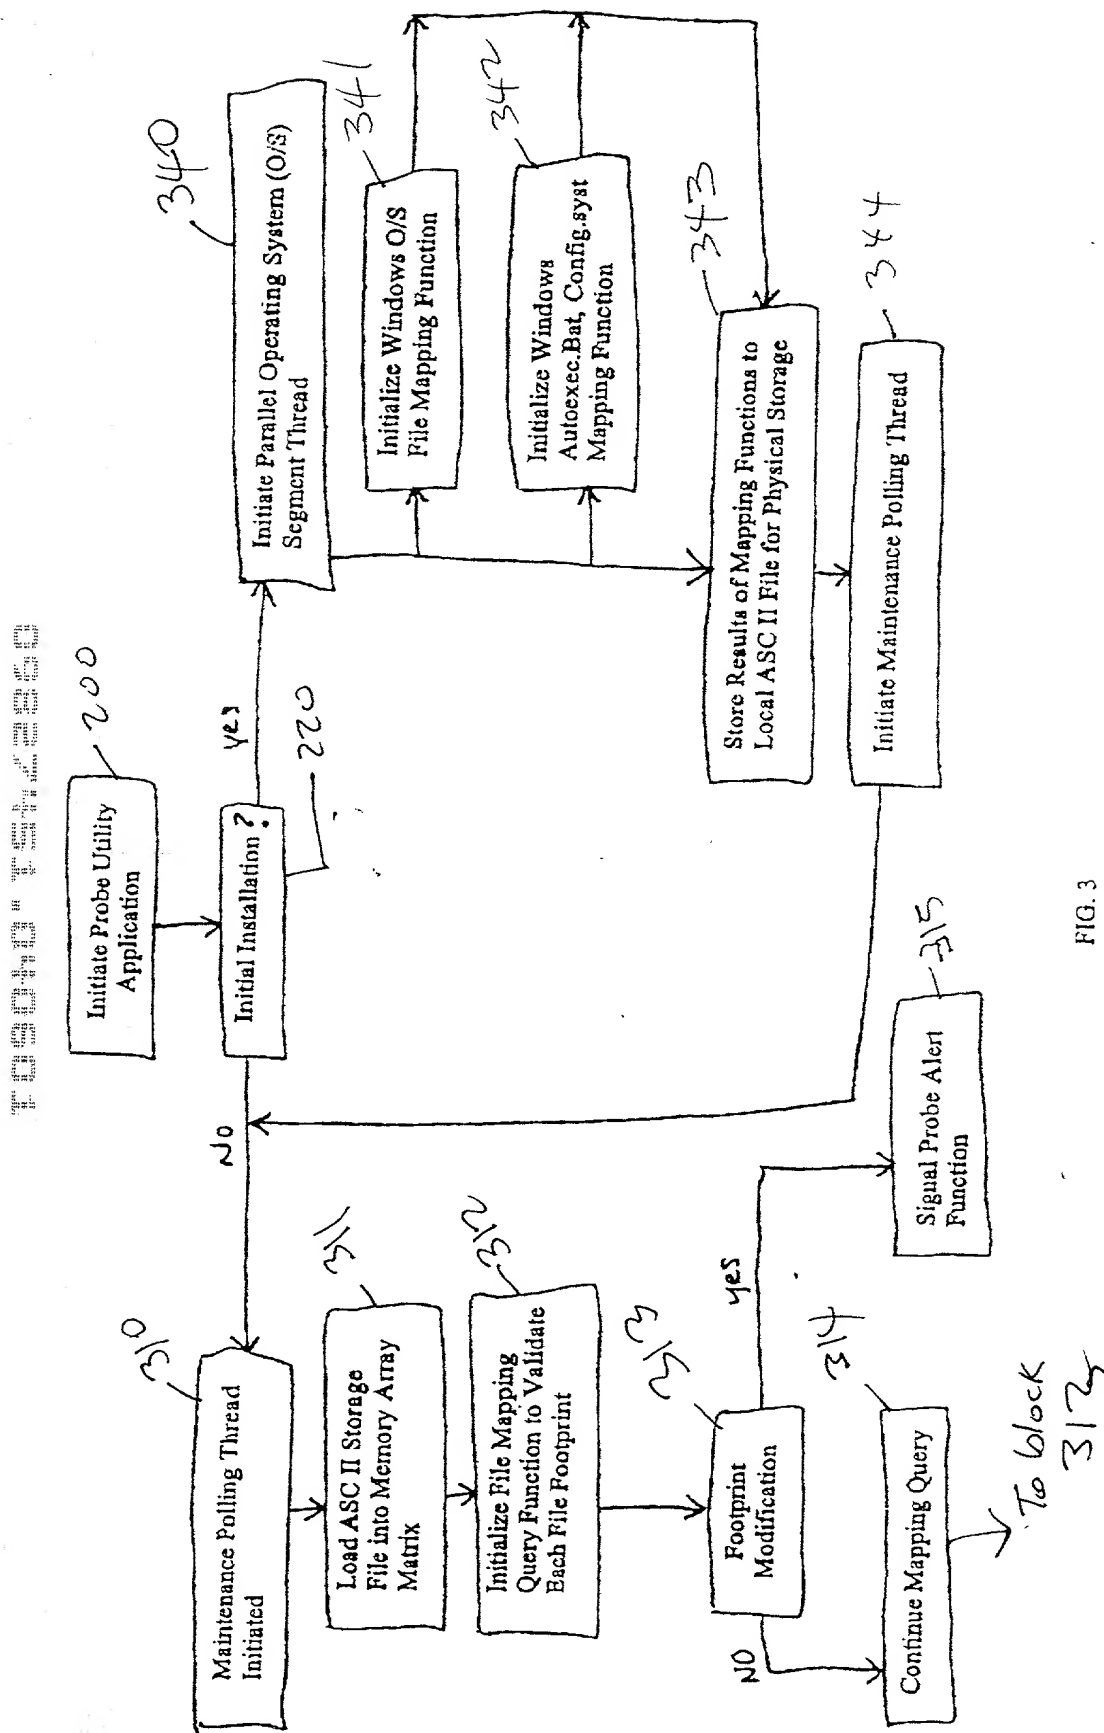


FIG. 2



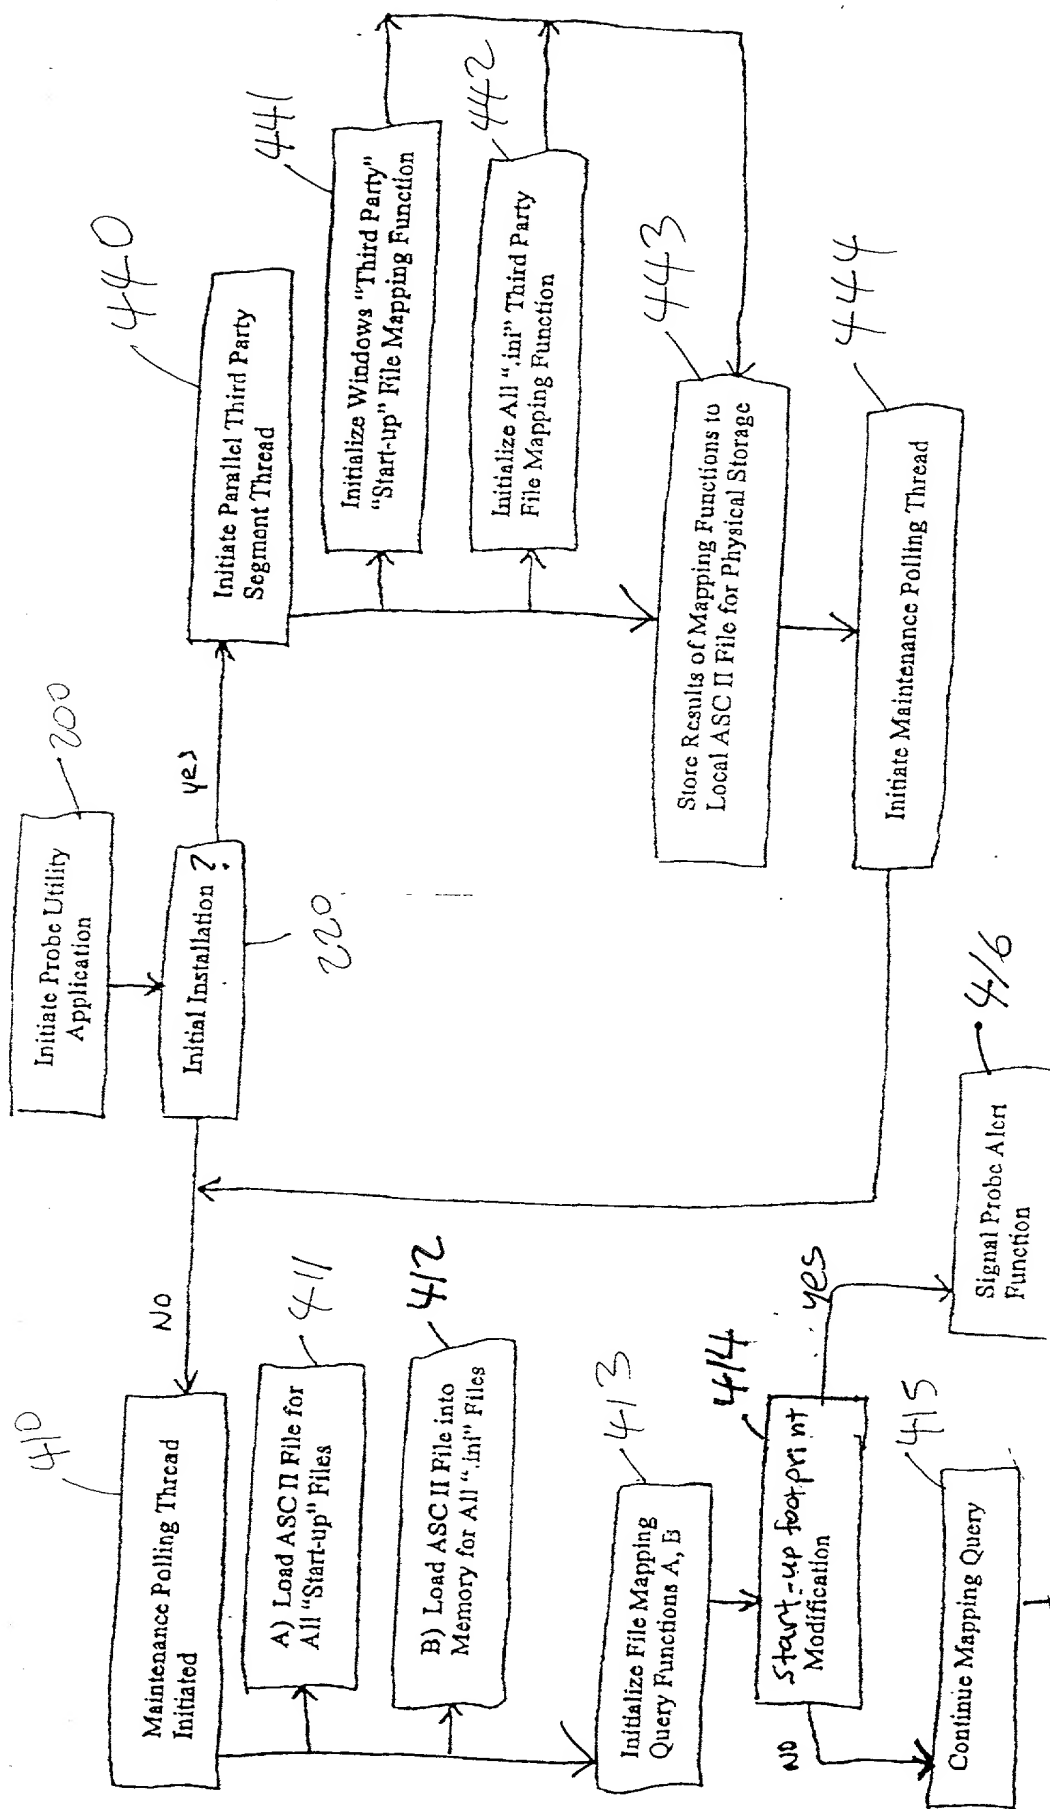


FIG. 4

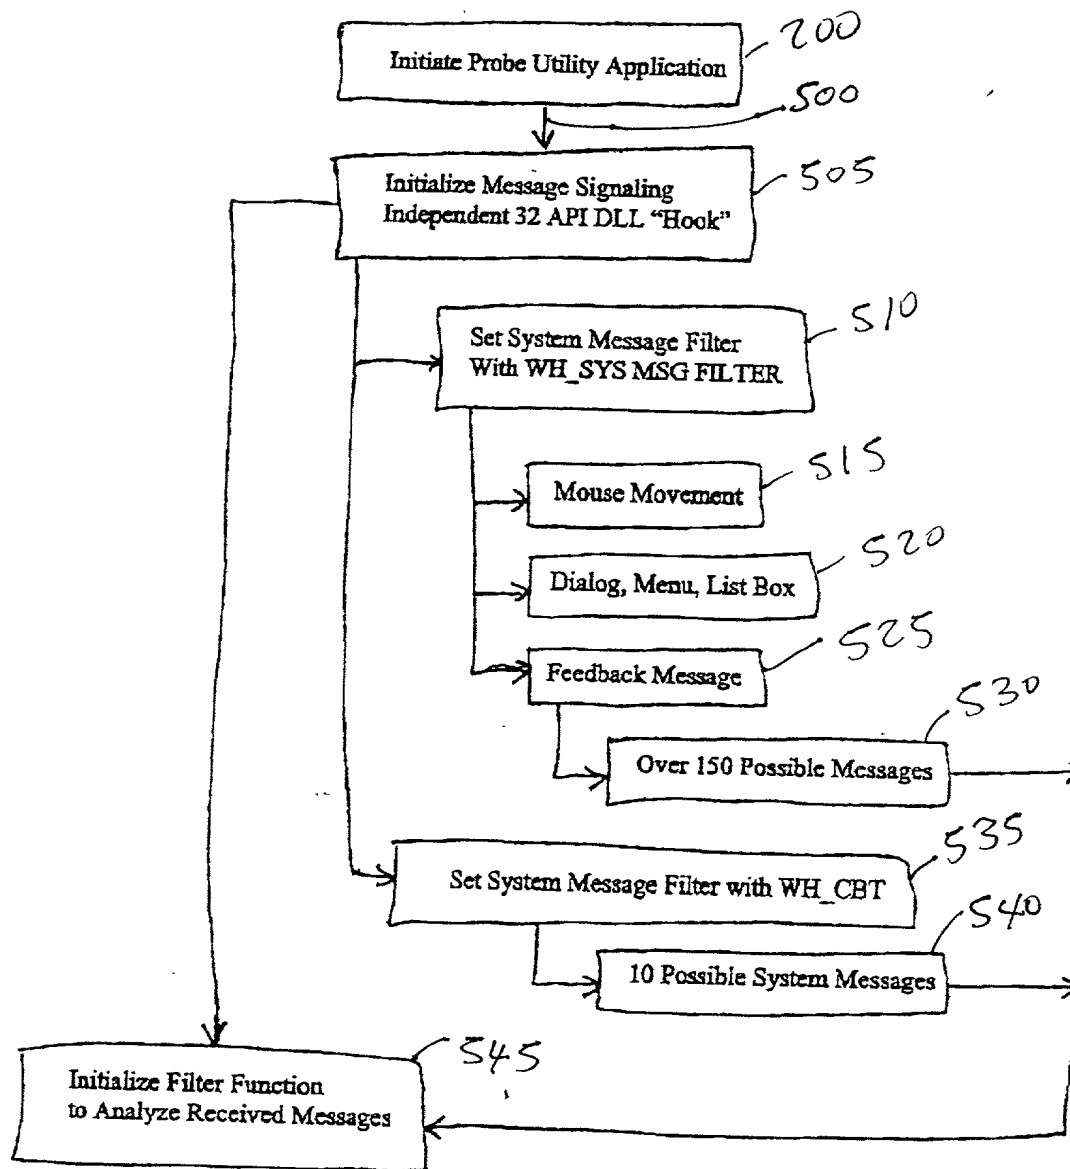


FIG. 5

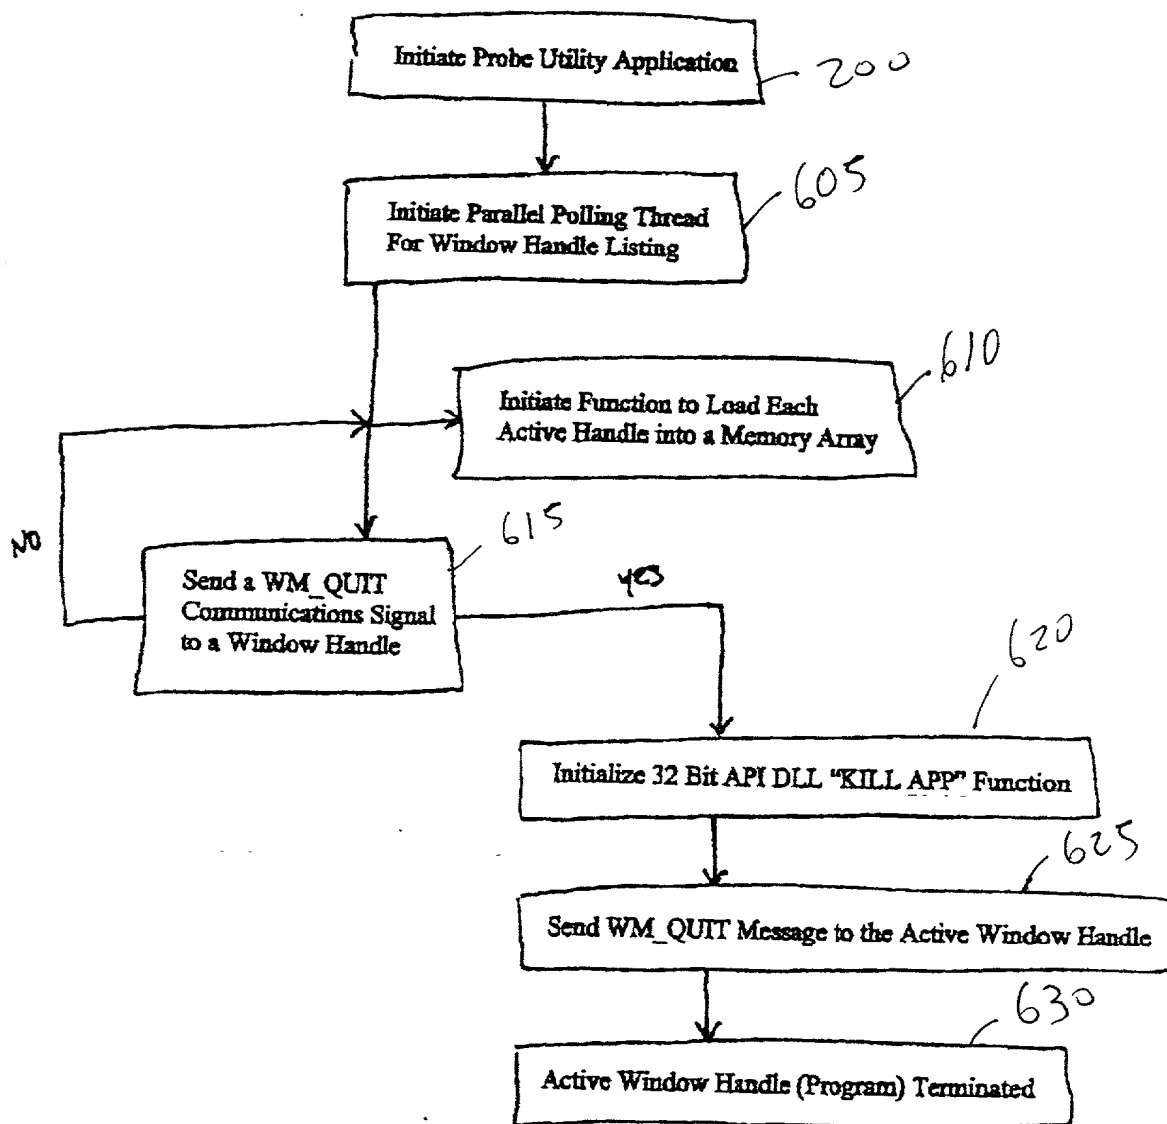


FIG. 6

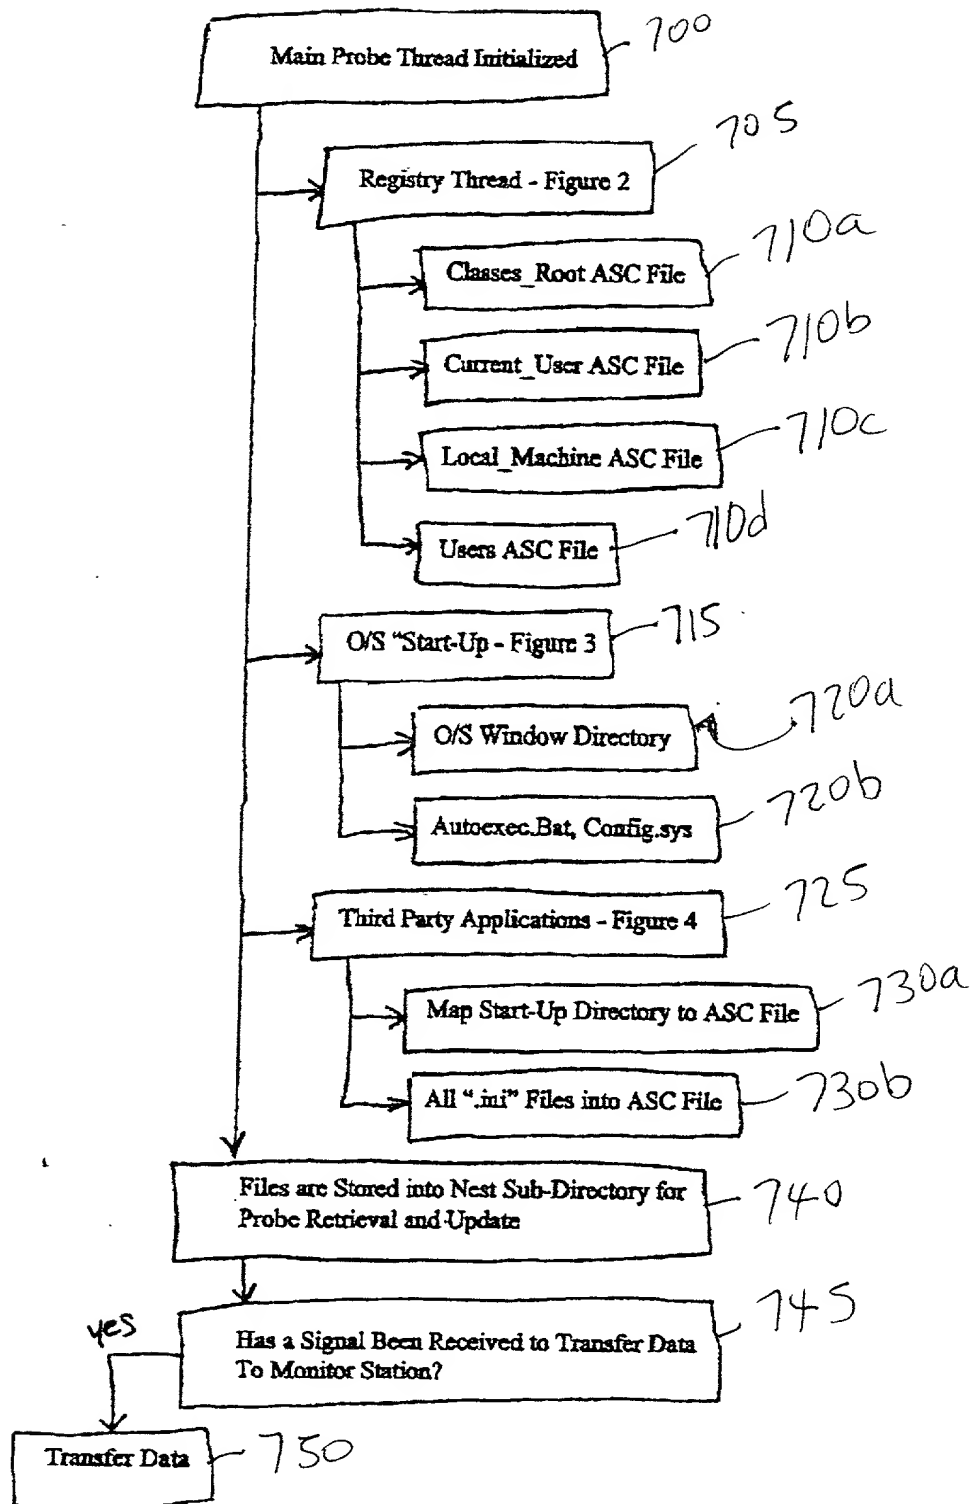


FIG. 7

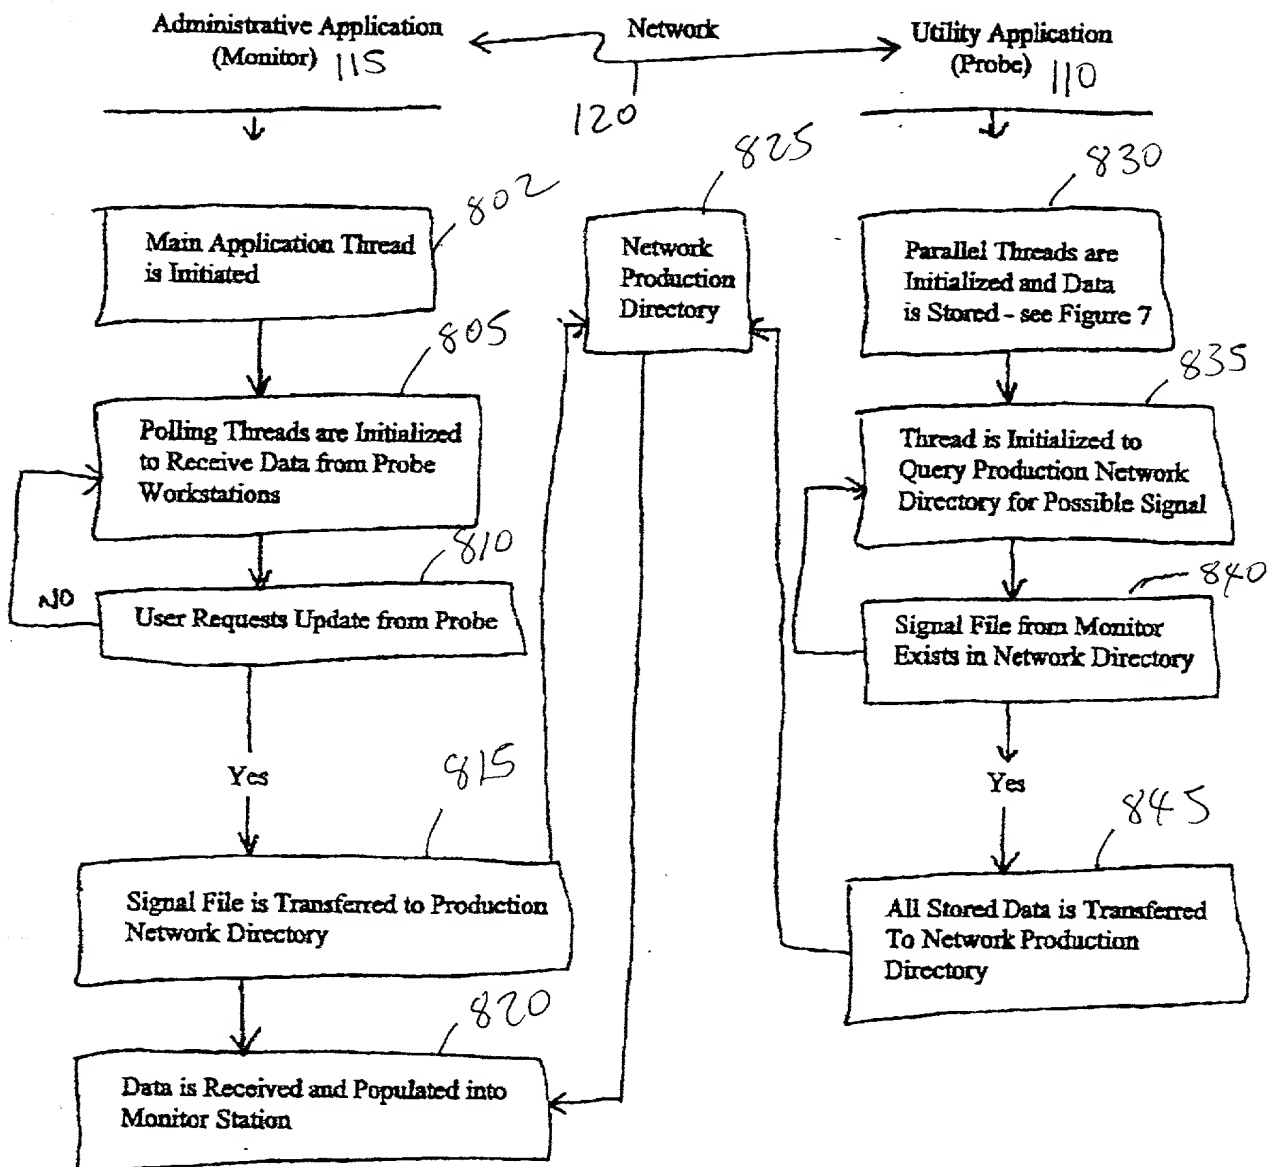


FIG. 8



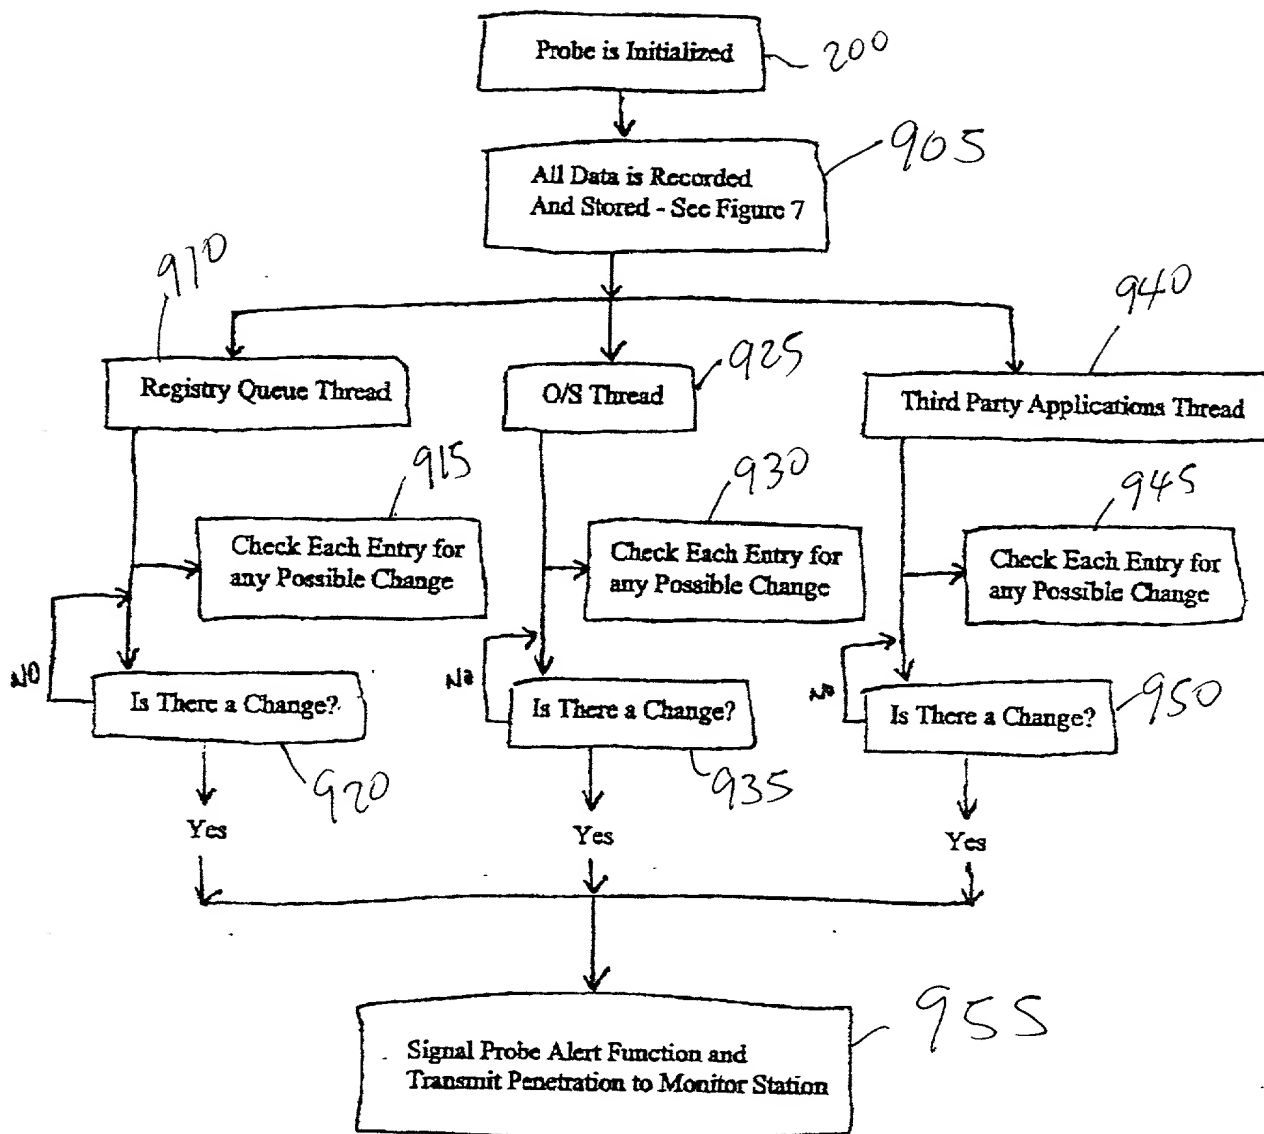


FIG. 9

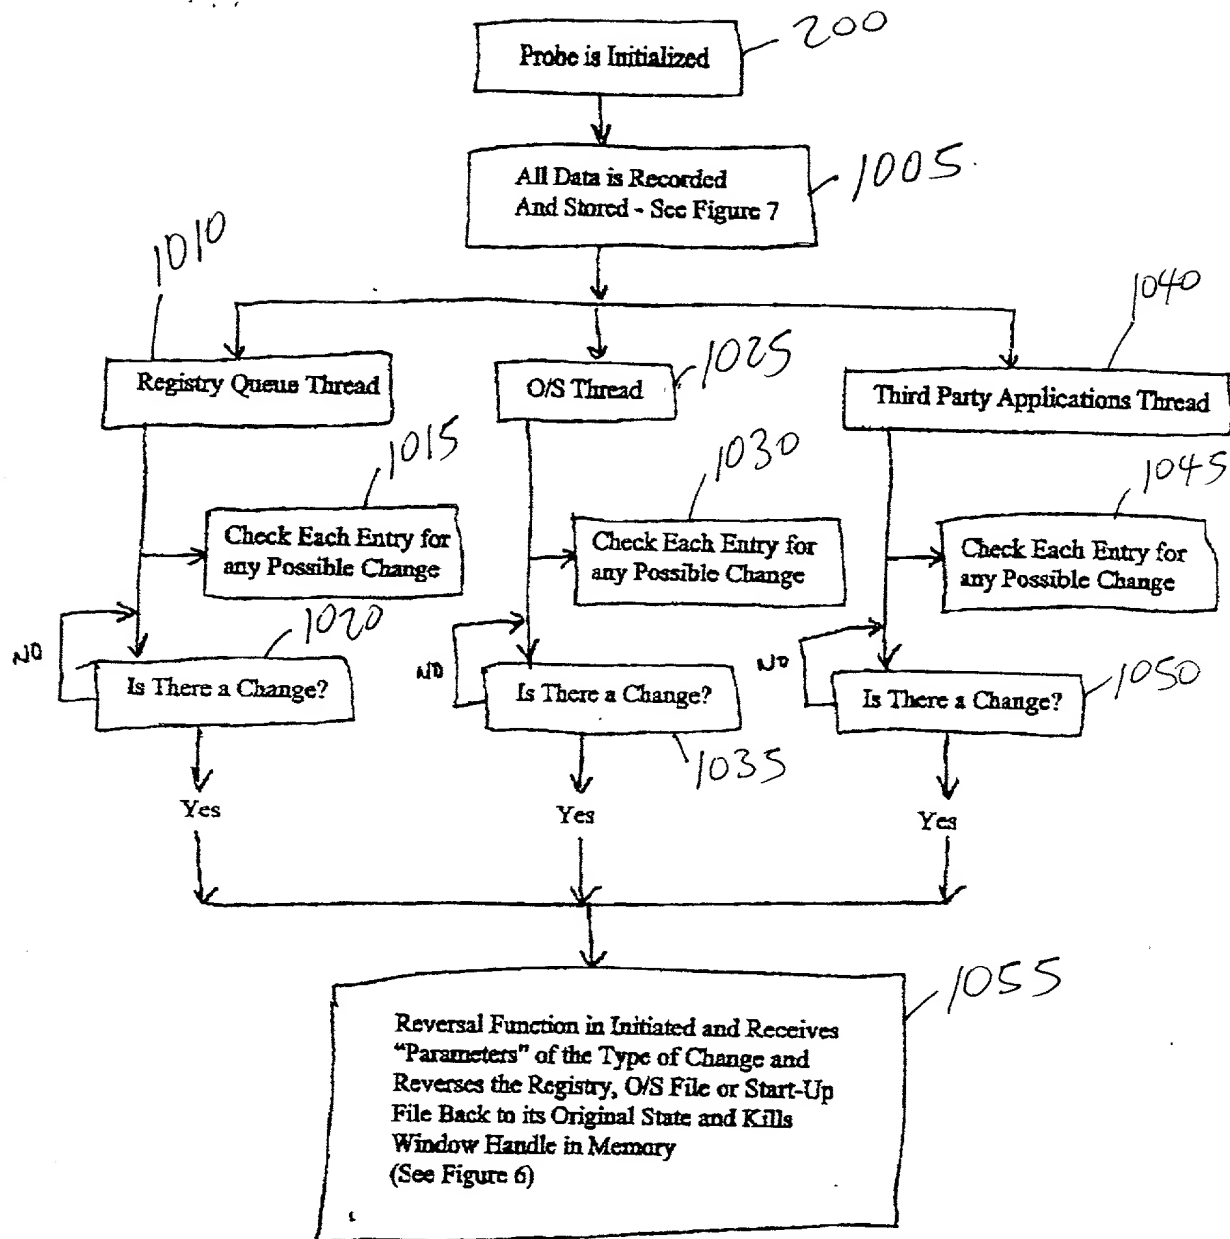


FIG. 10

1100  
SOT[cr] [lf]

Date=CCYY\MM\DD[cr] [lf]

Time=HH:MM:SS[cr] [lf]

3Wind=Variable Up To 500 Characters[cr] [lf]

2Wind=Variable Up To 500 Characters[cr] [lf]

1Wind=Variable Up To 500 Characters[cr] [lf]

Mssg=Variable Up To 500 Characters[cr] [lf]

EOT[cr] [lf]

Structured Signal File Block Diagram

Figure 11

Figure 12

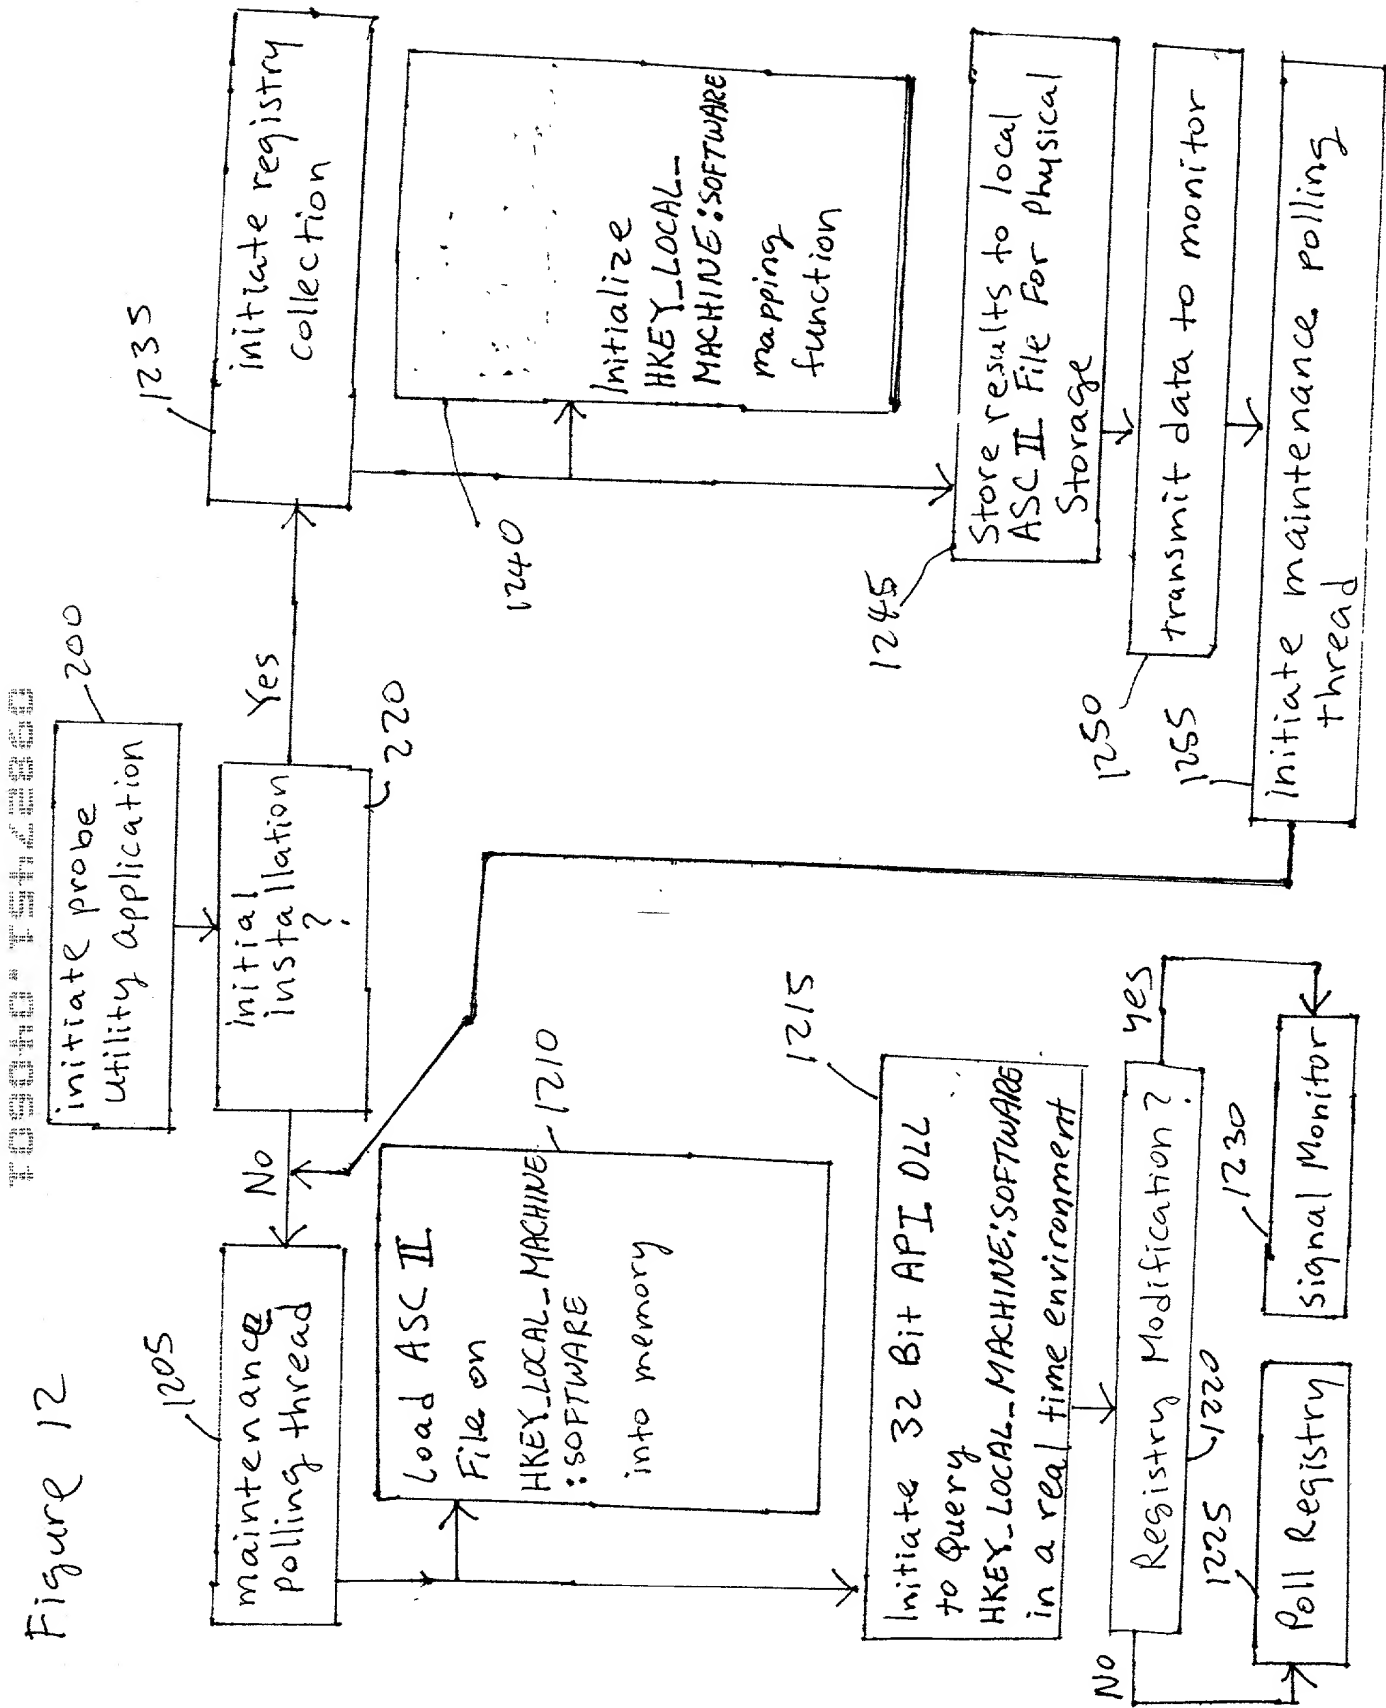


Figure 13

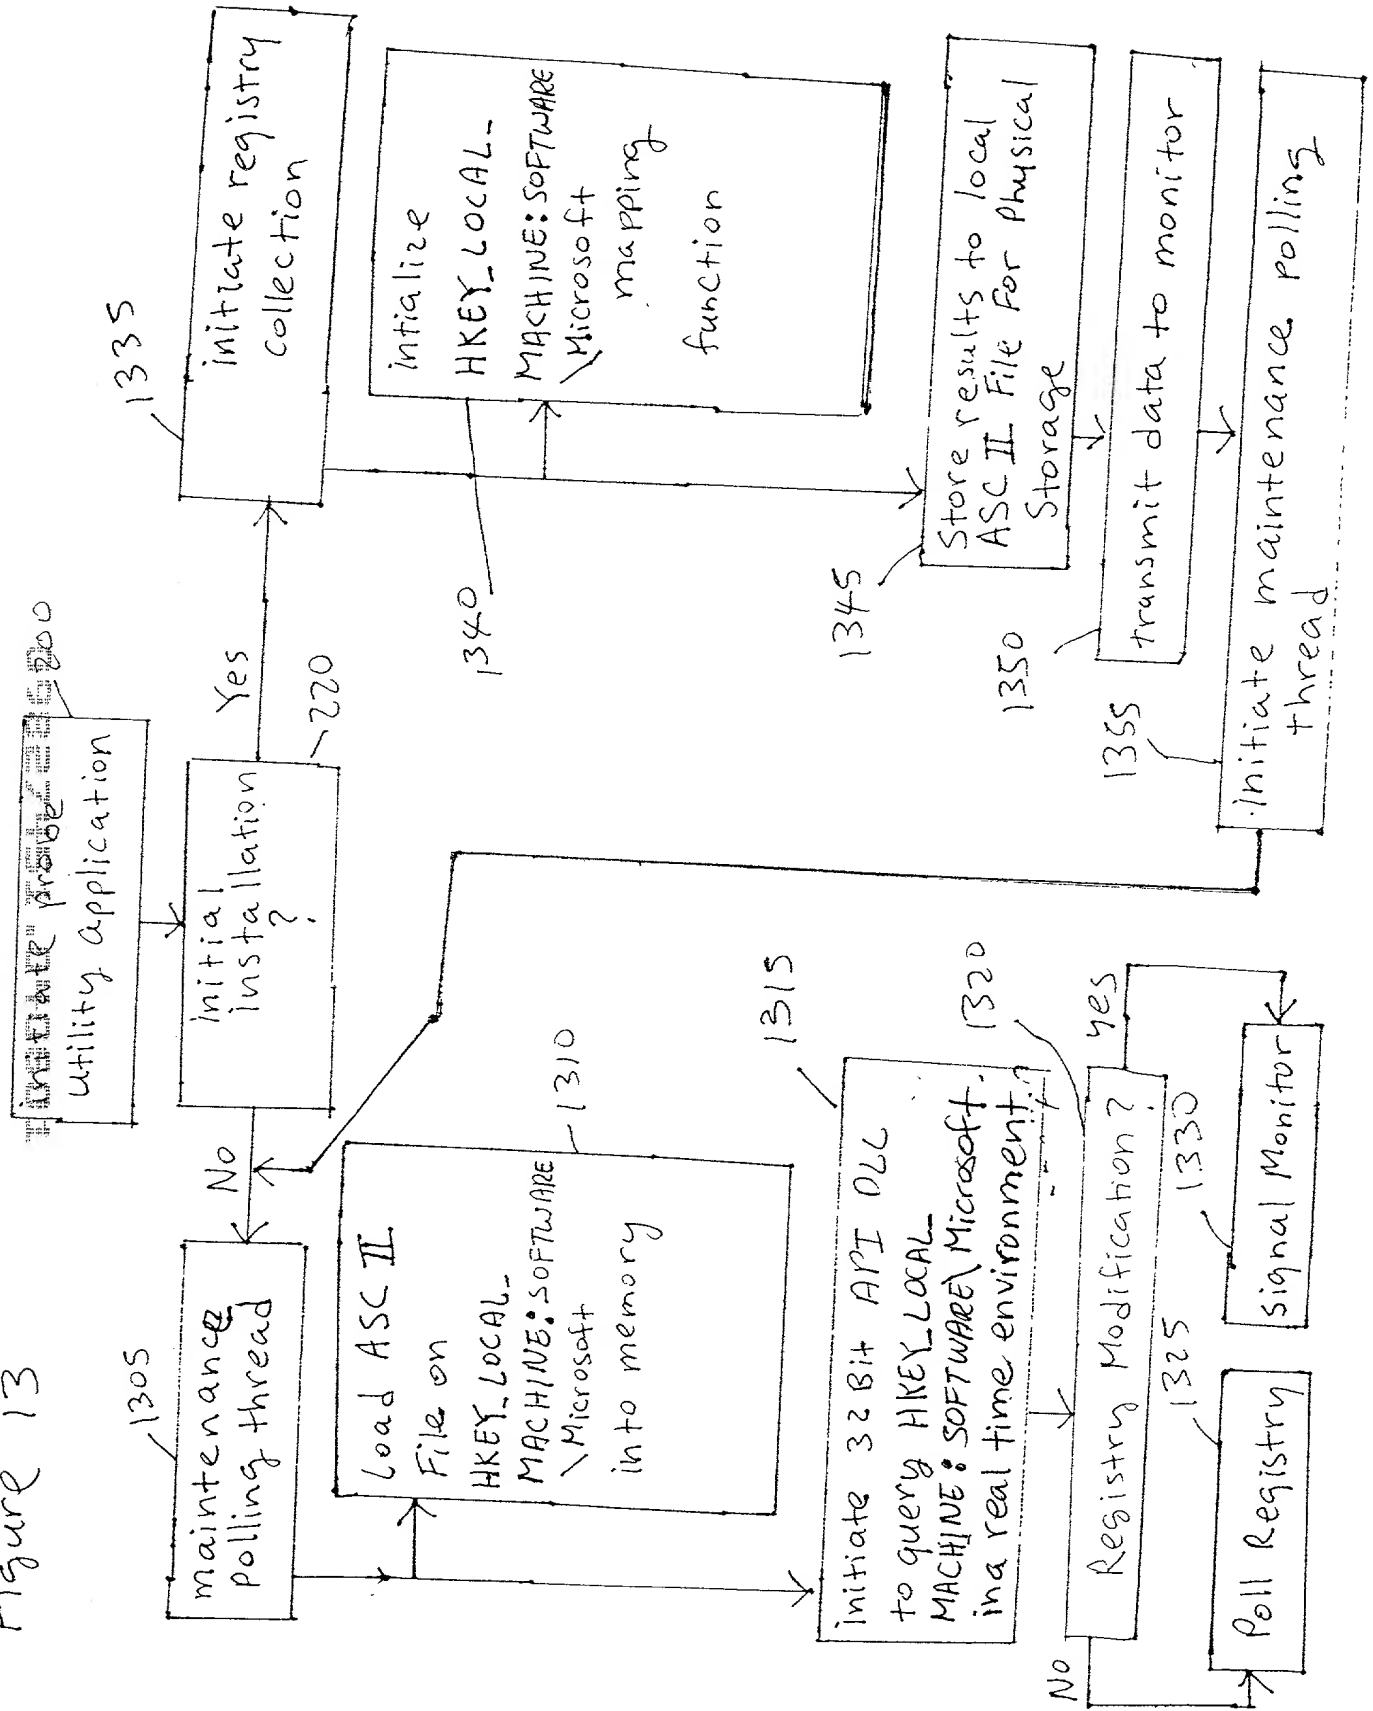


Figure 14

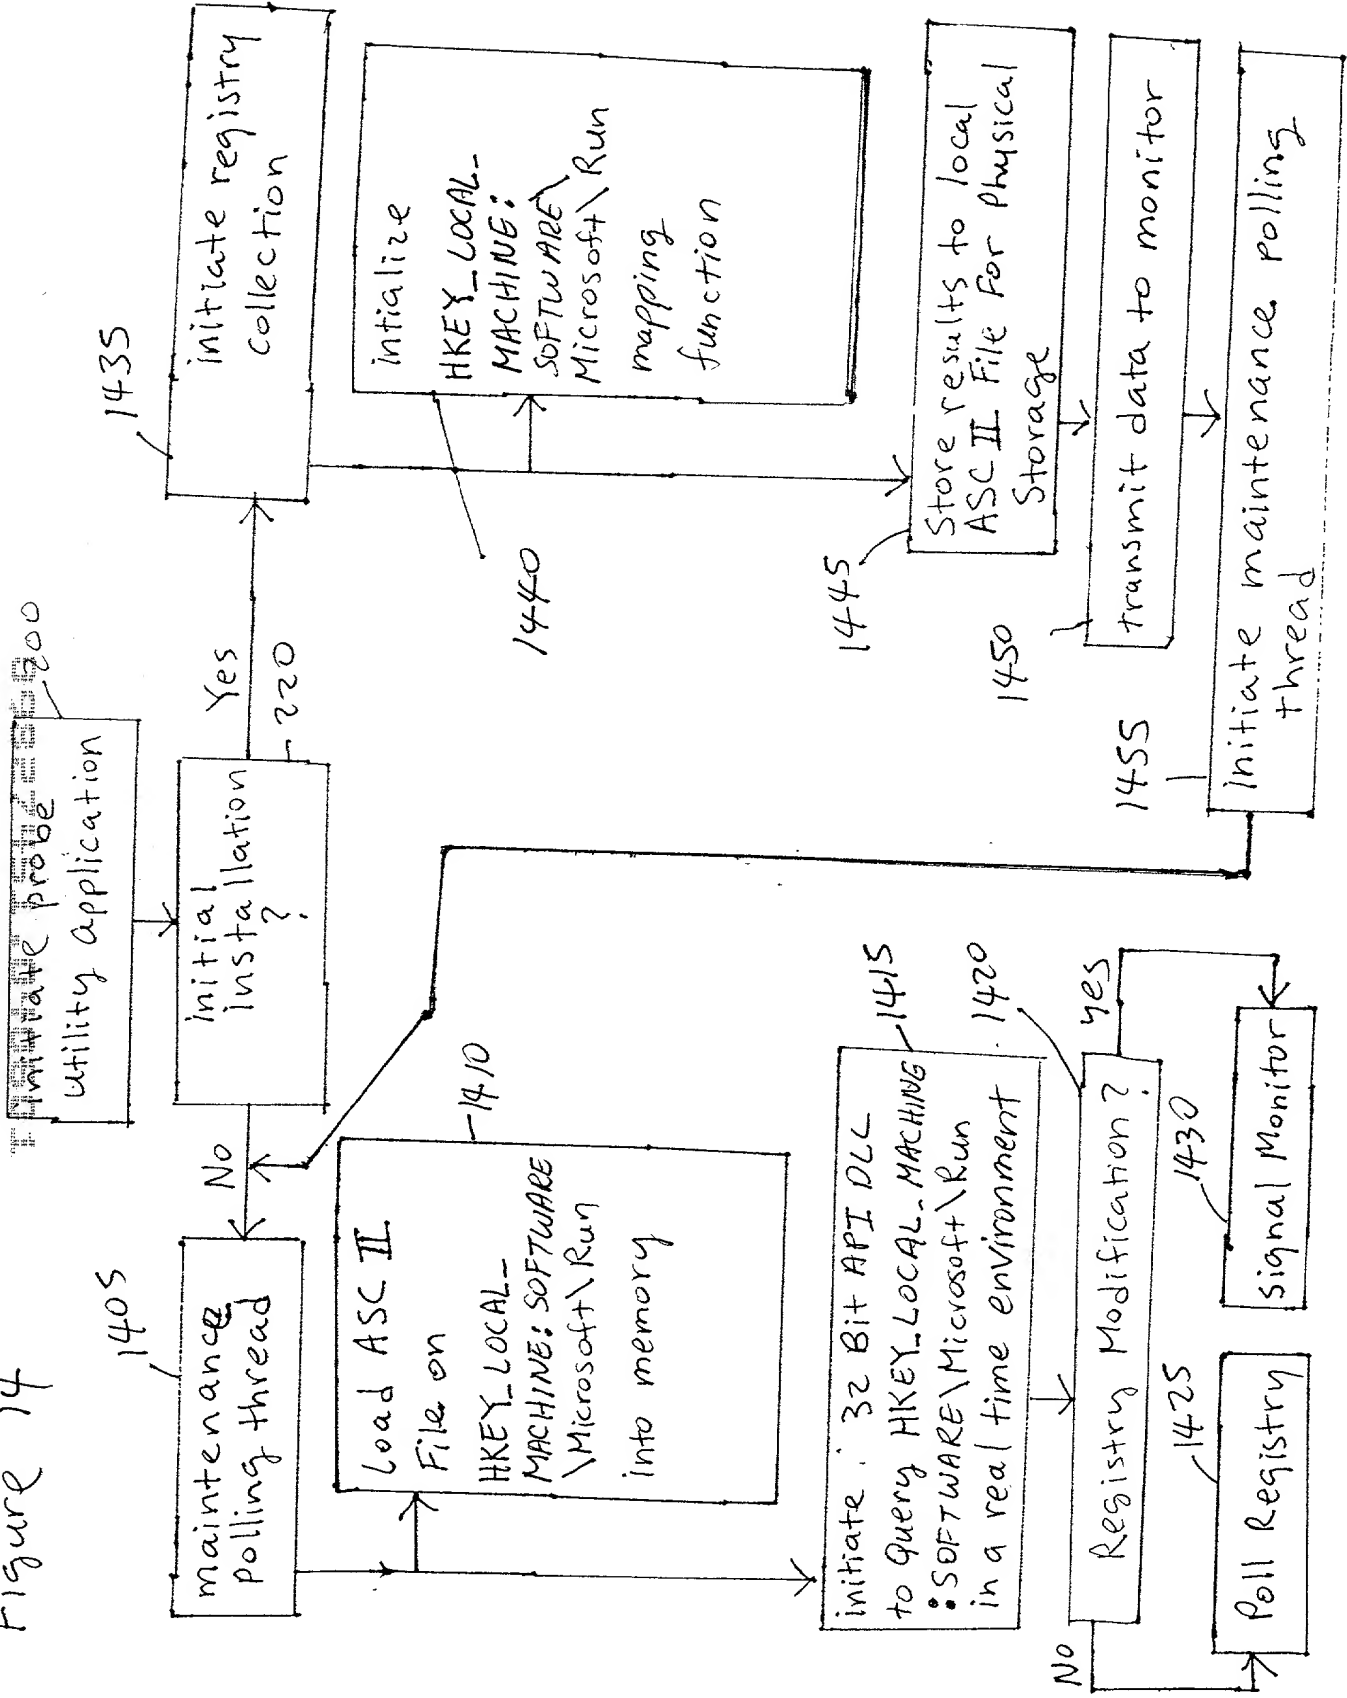


Figure 15

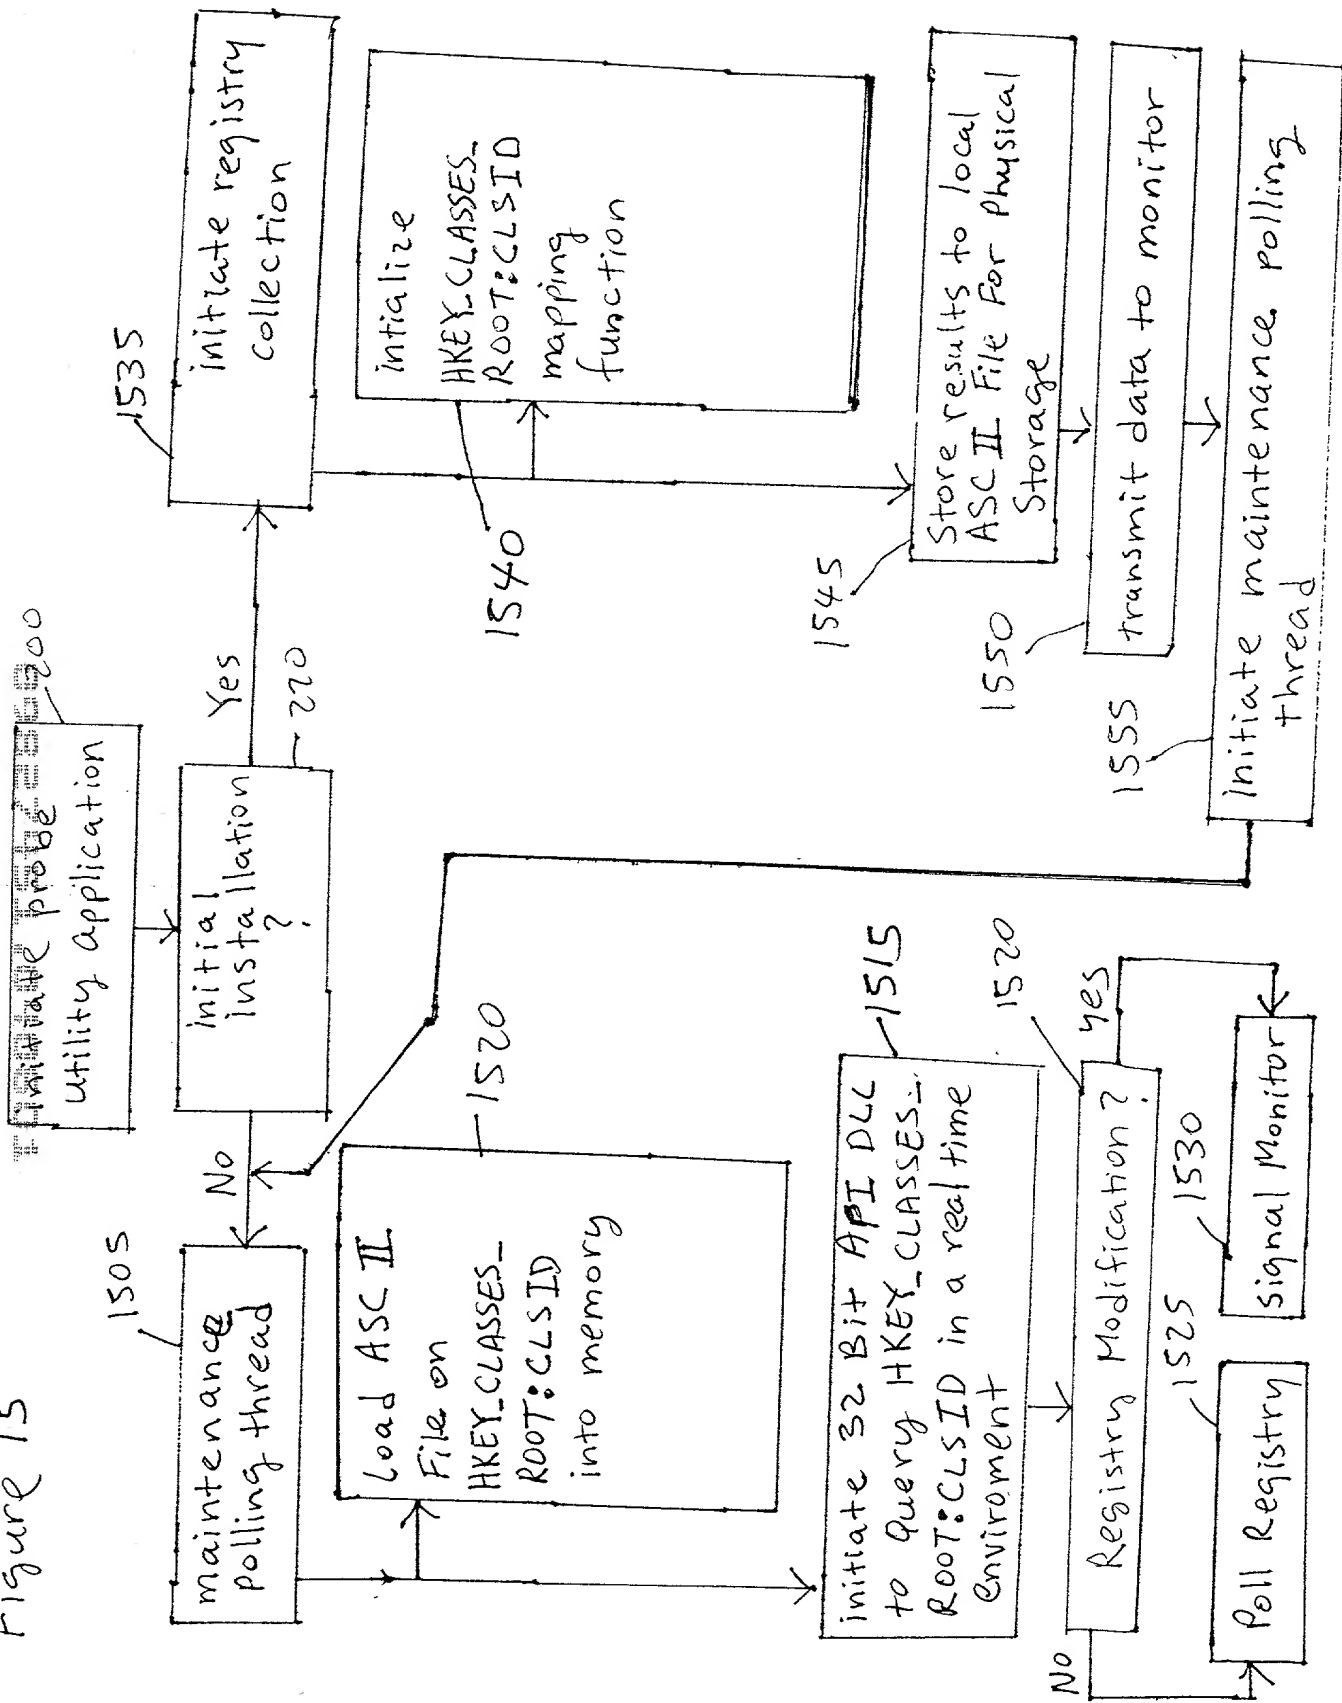


Figure 16

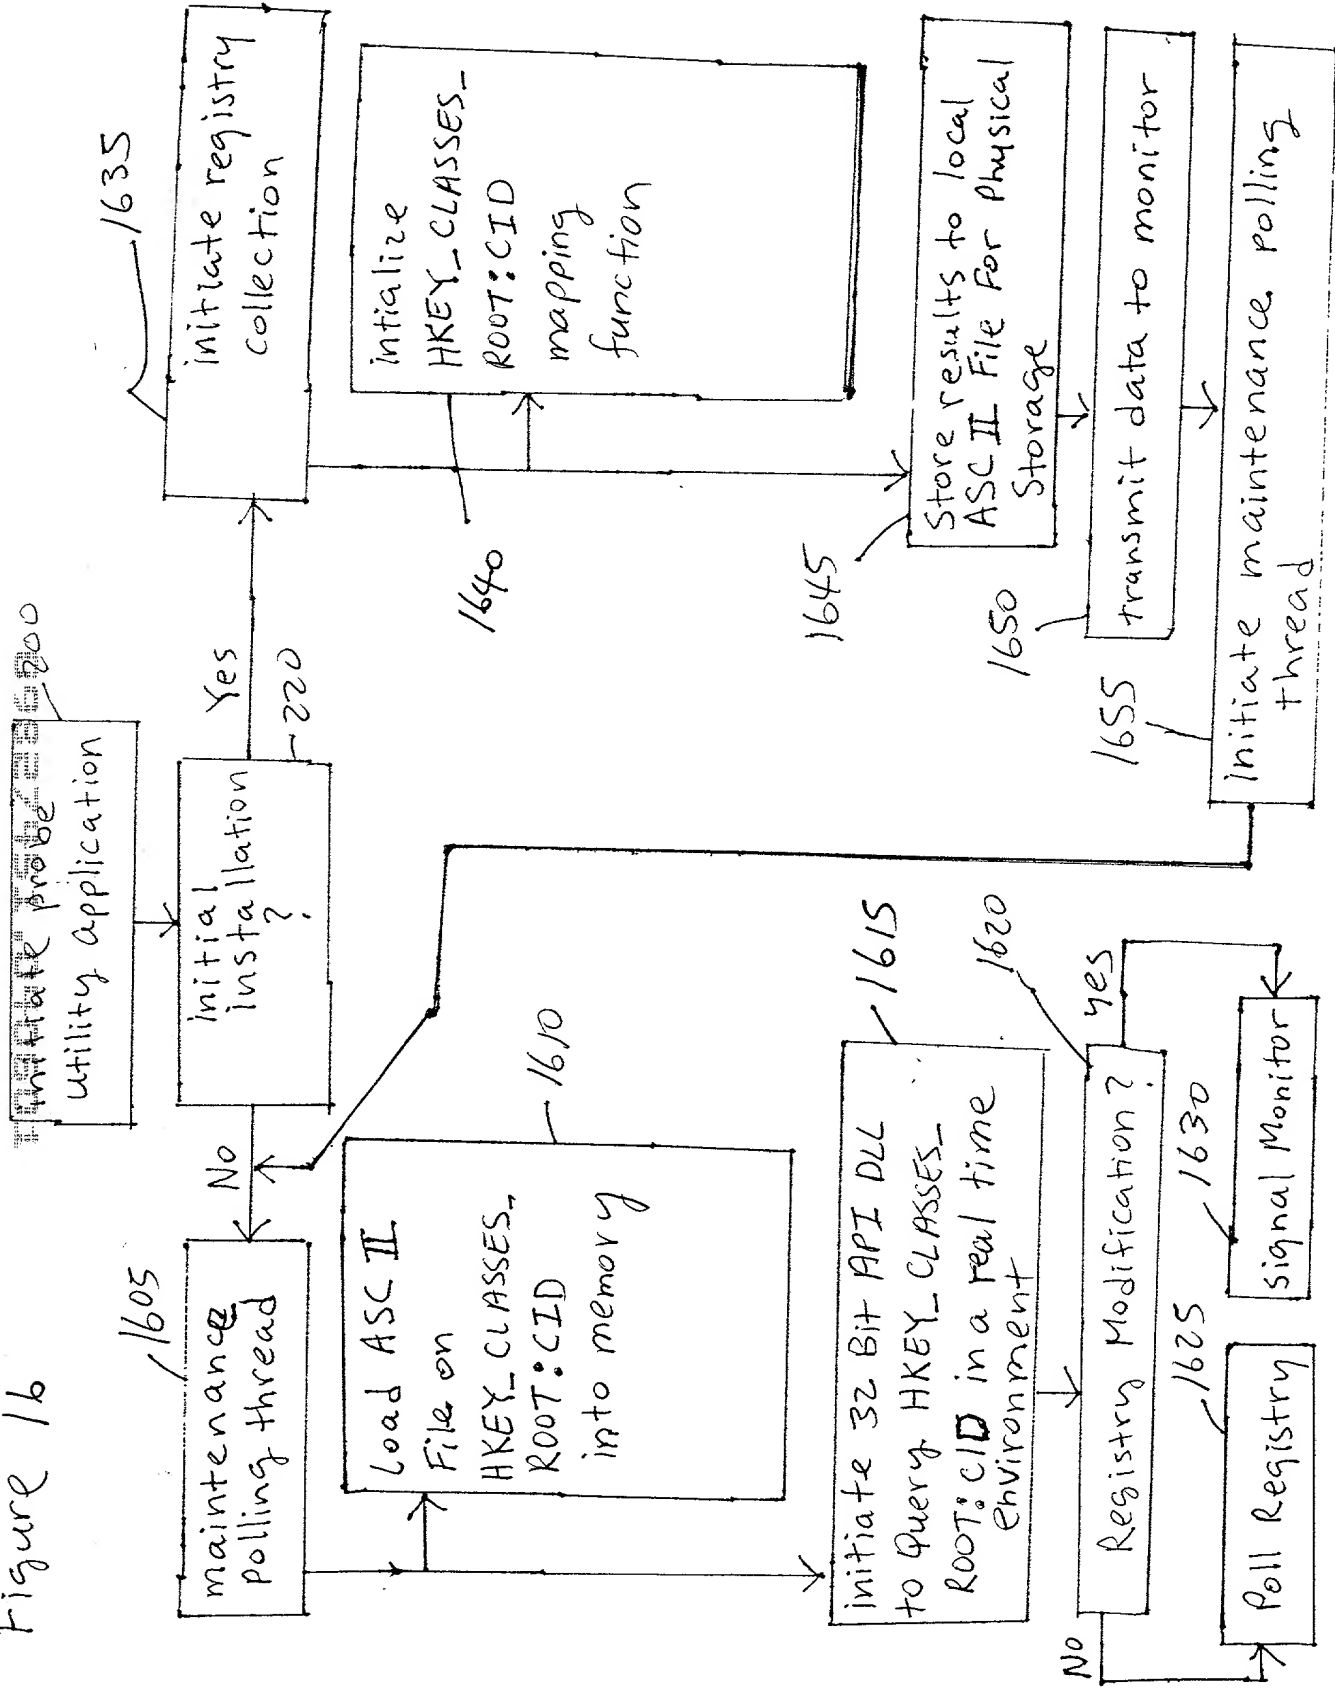




Figure 17

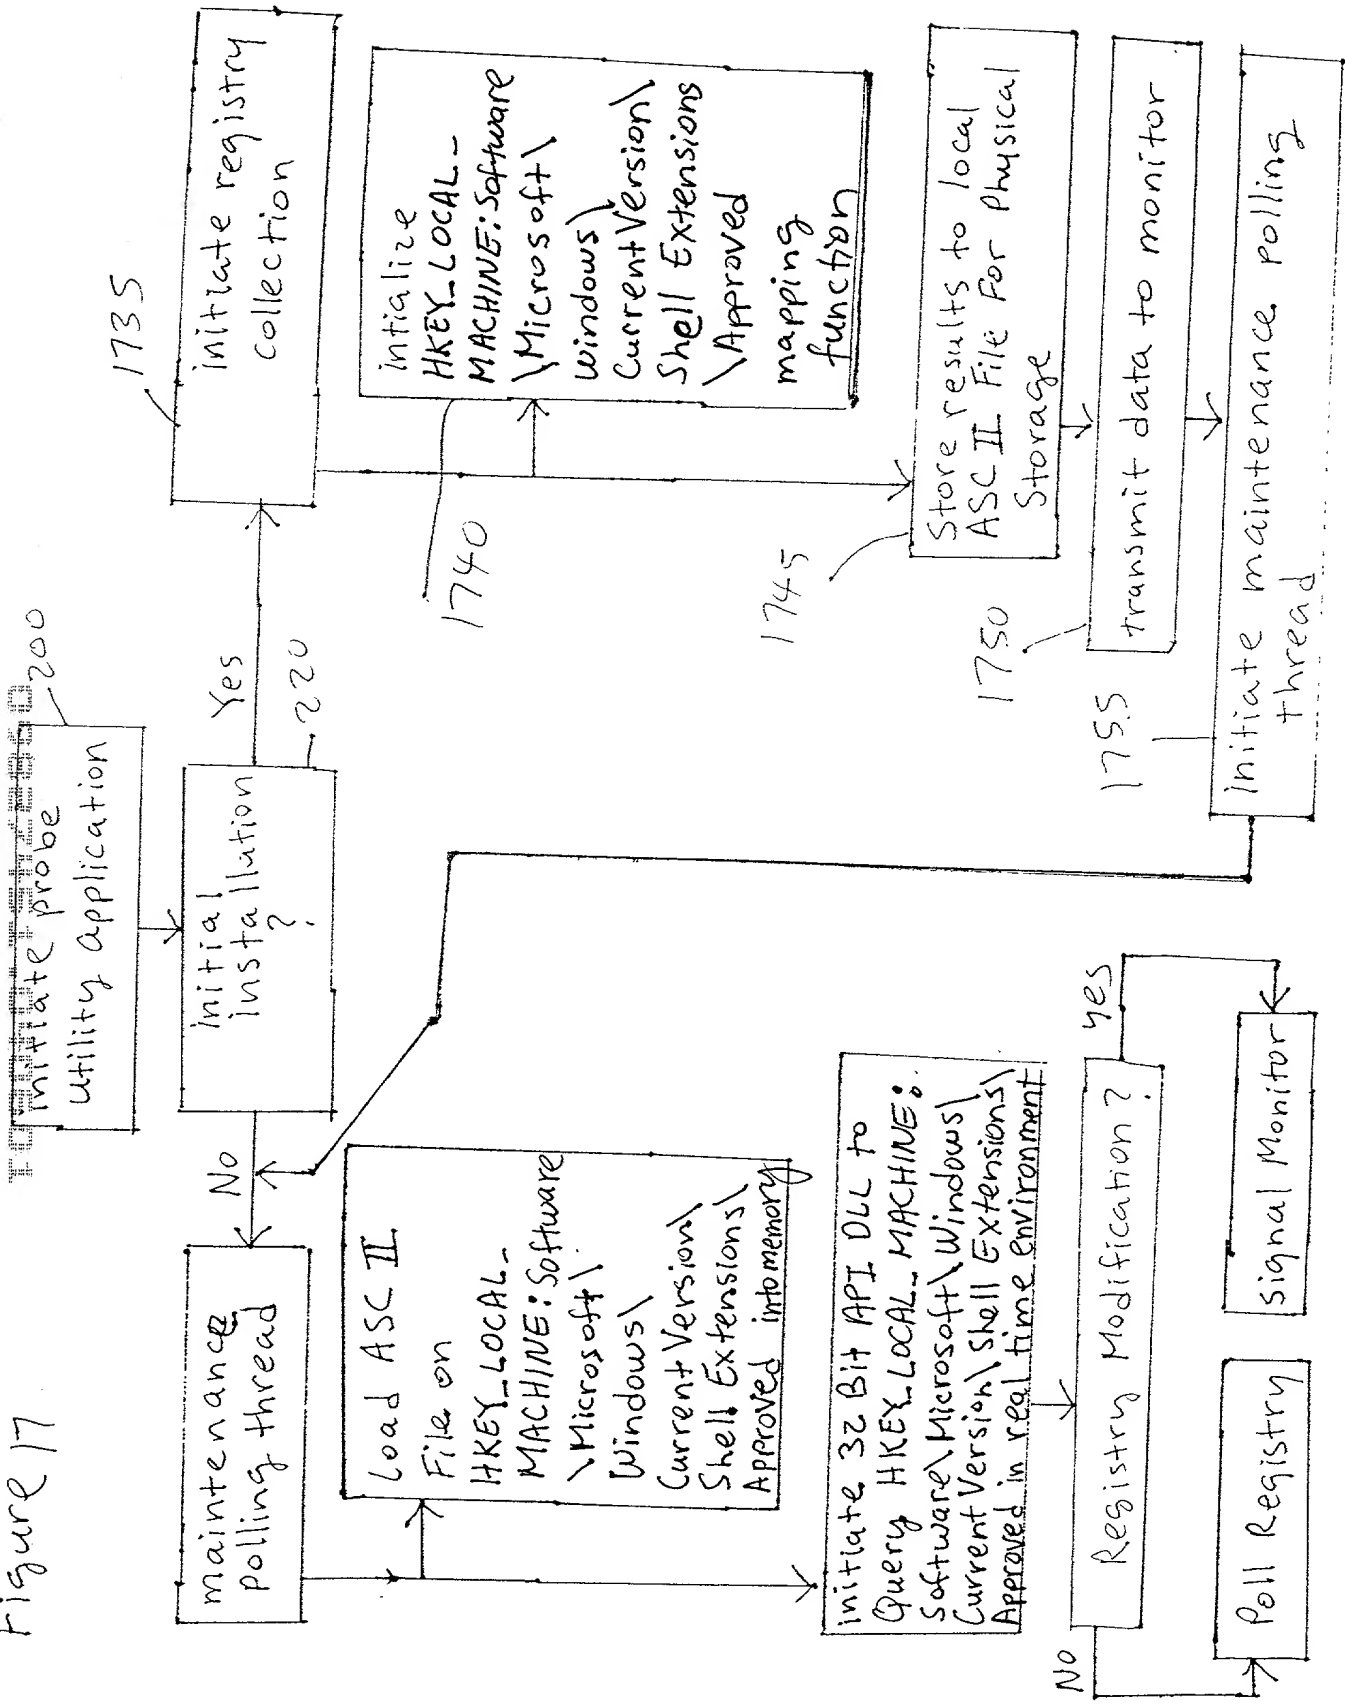


Figure 18

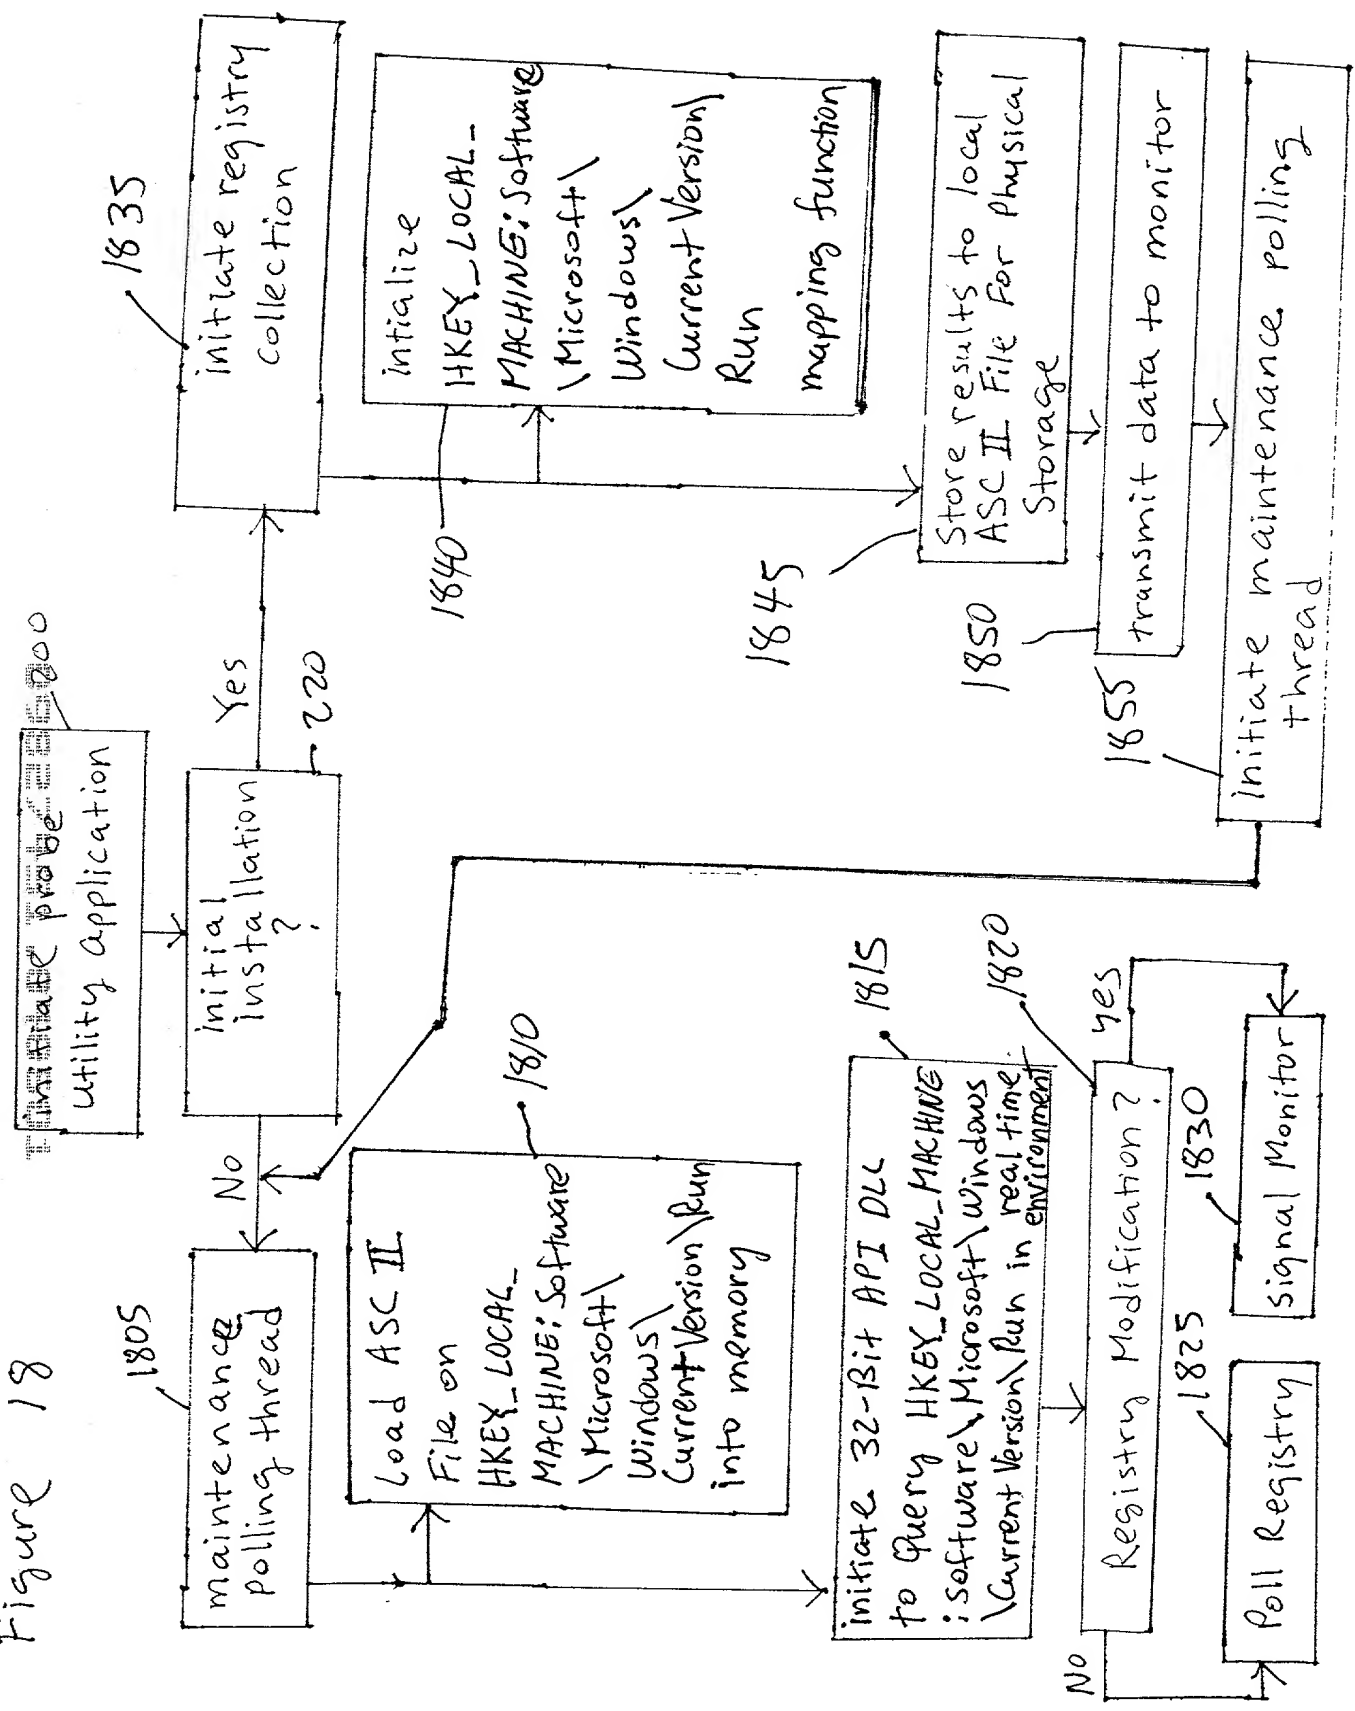


Figure 19

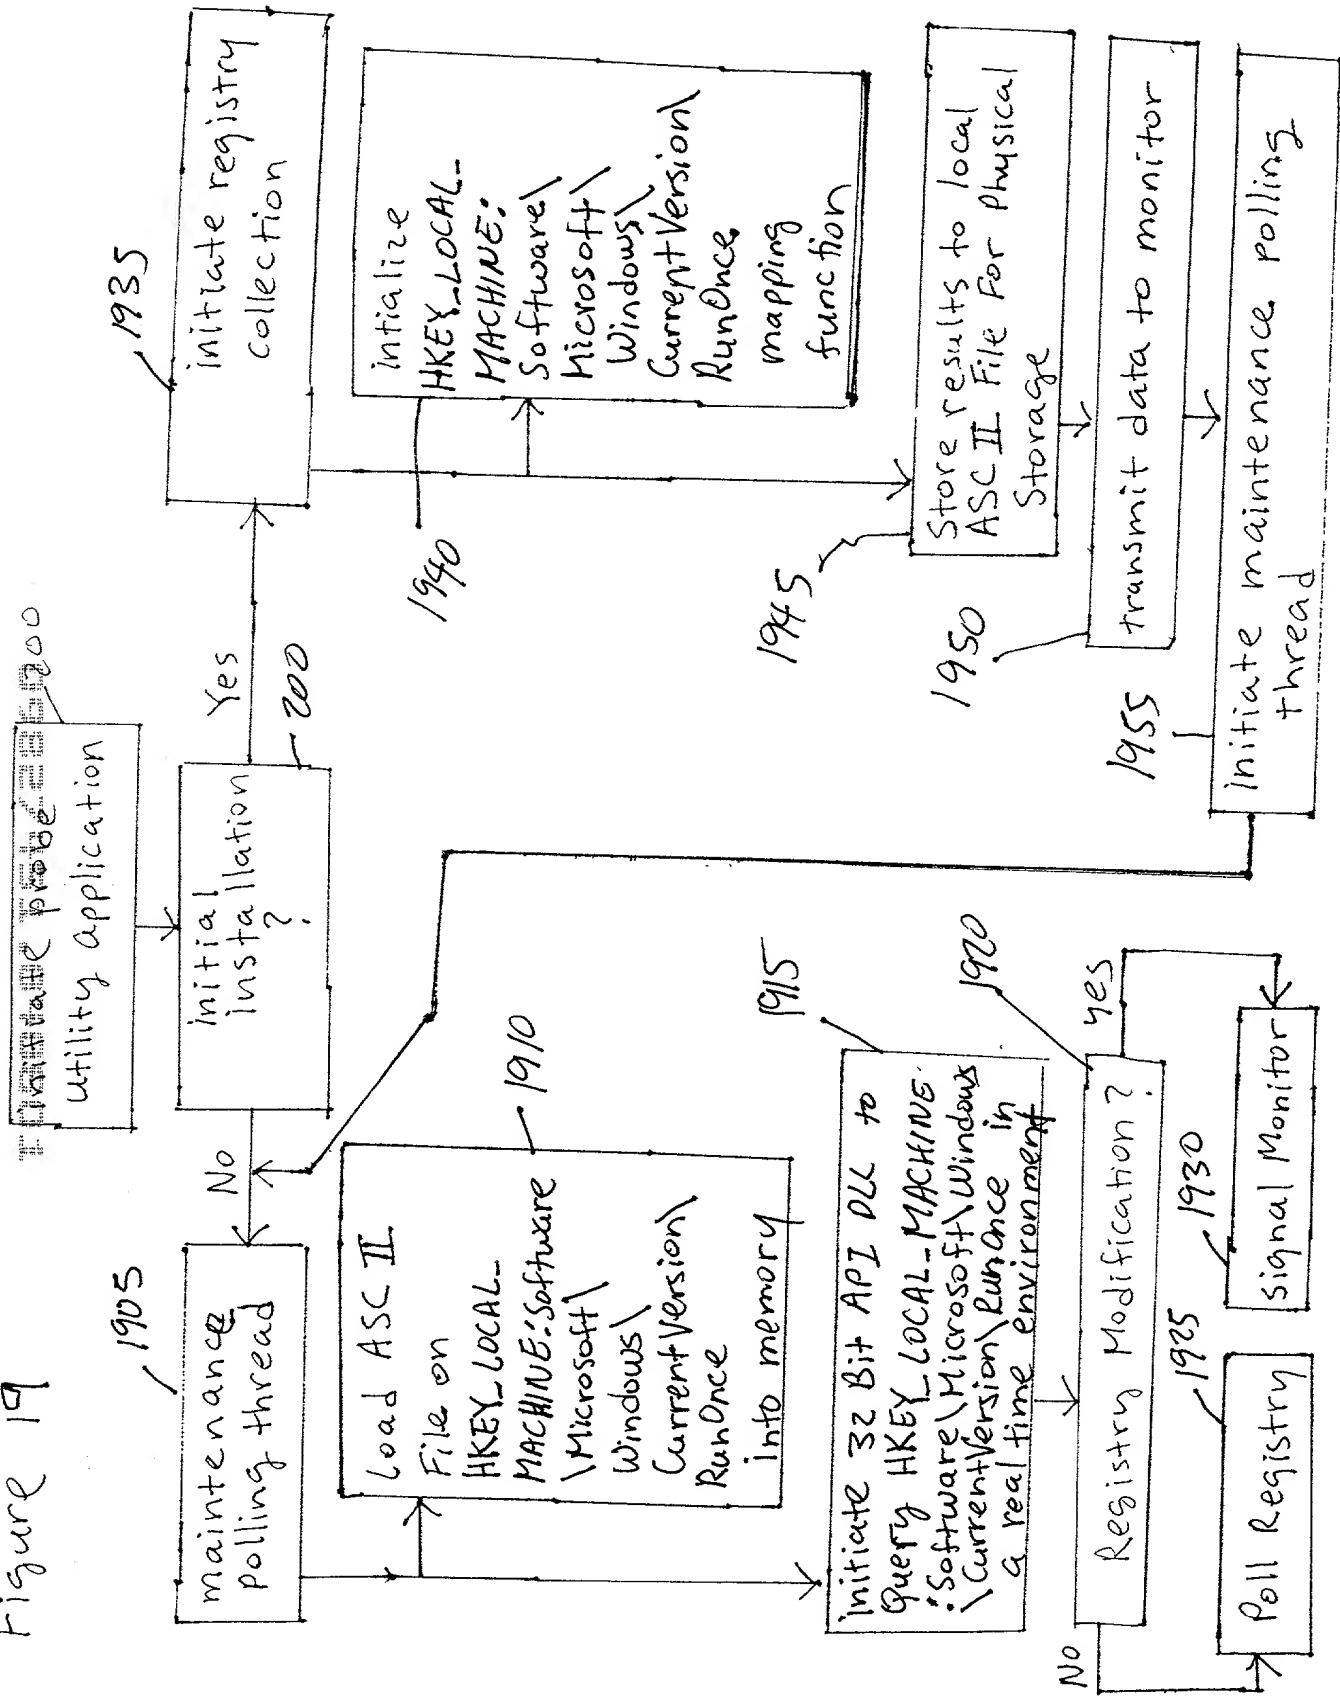


Figure 20



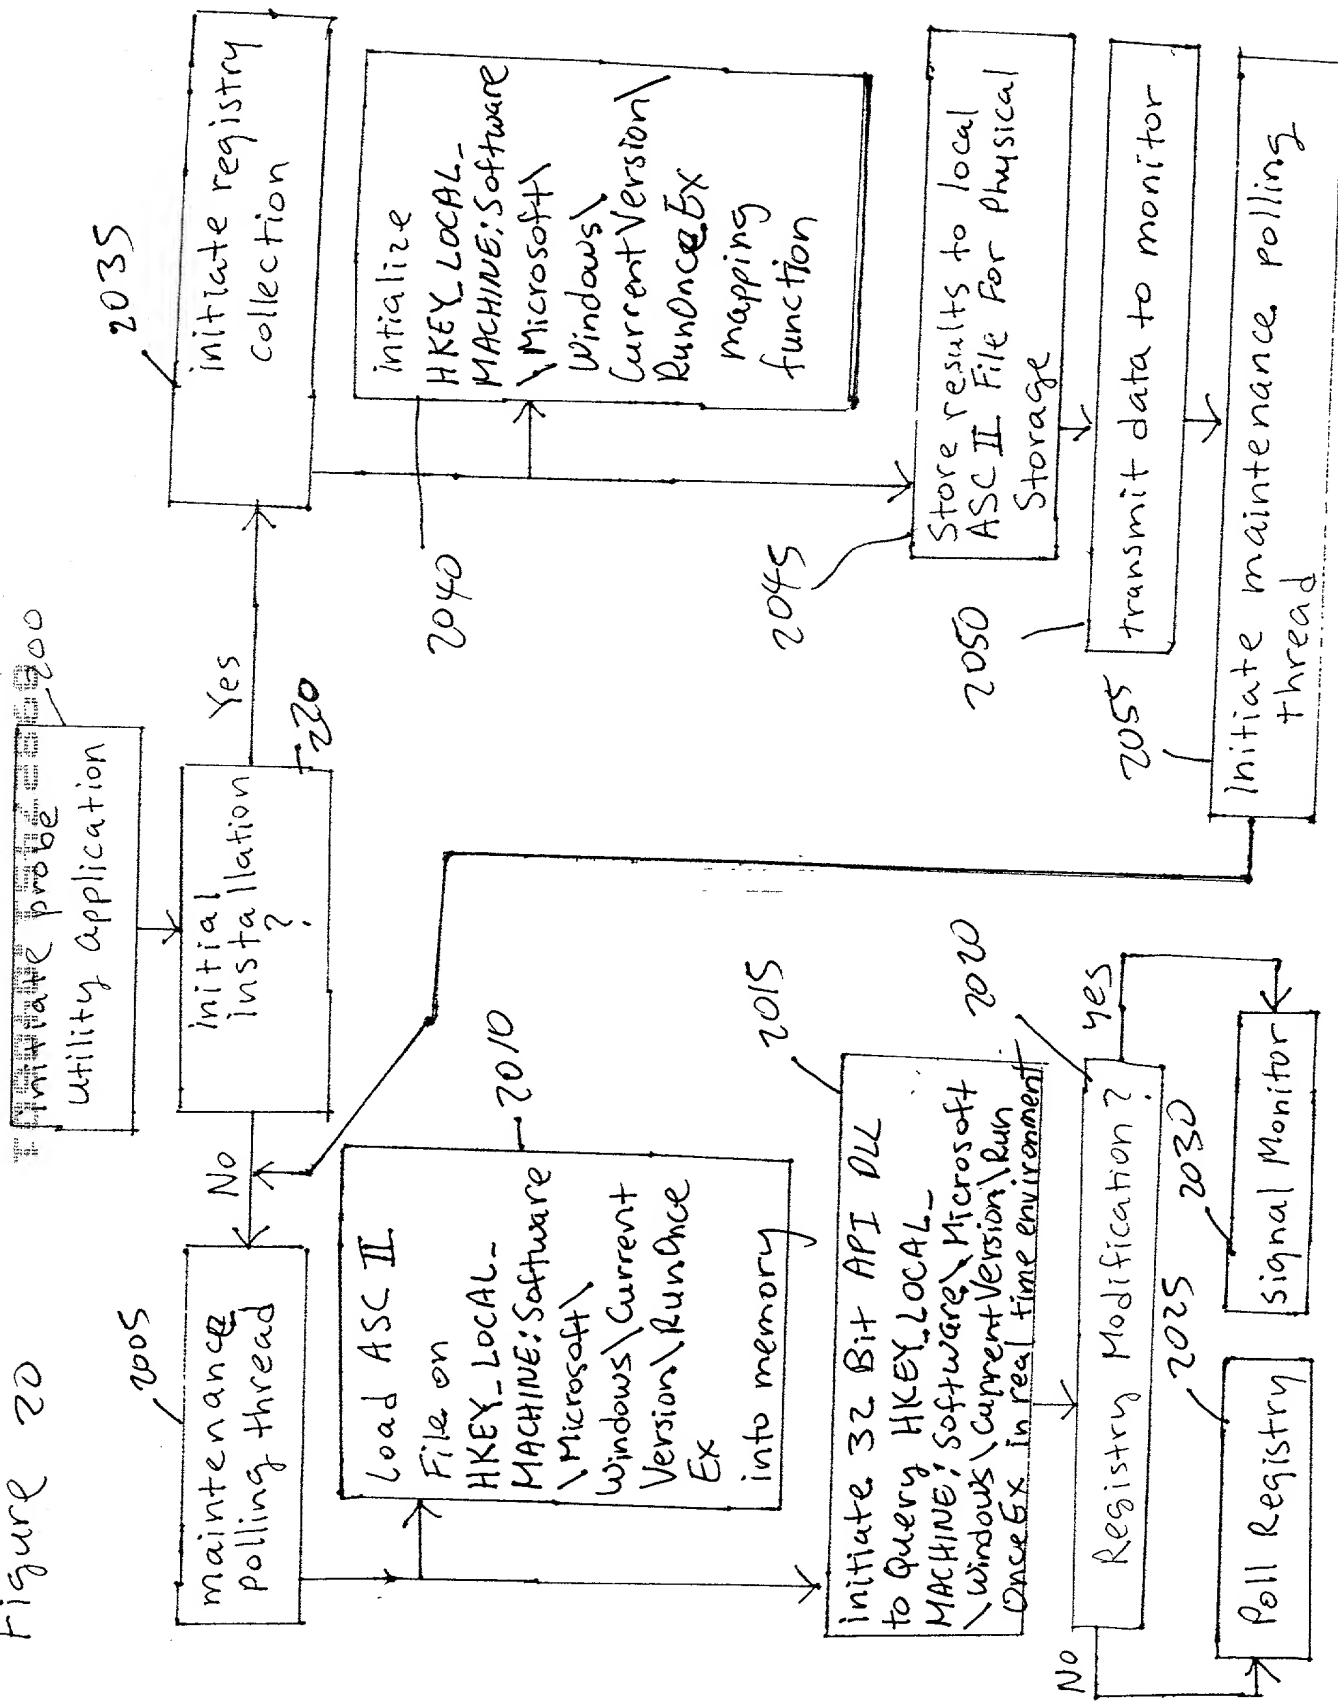


Figure 21

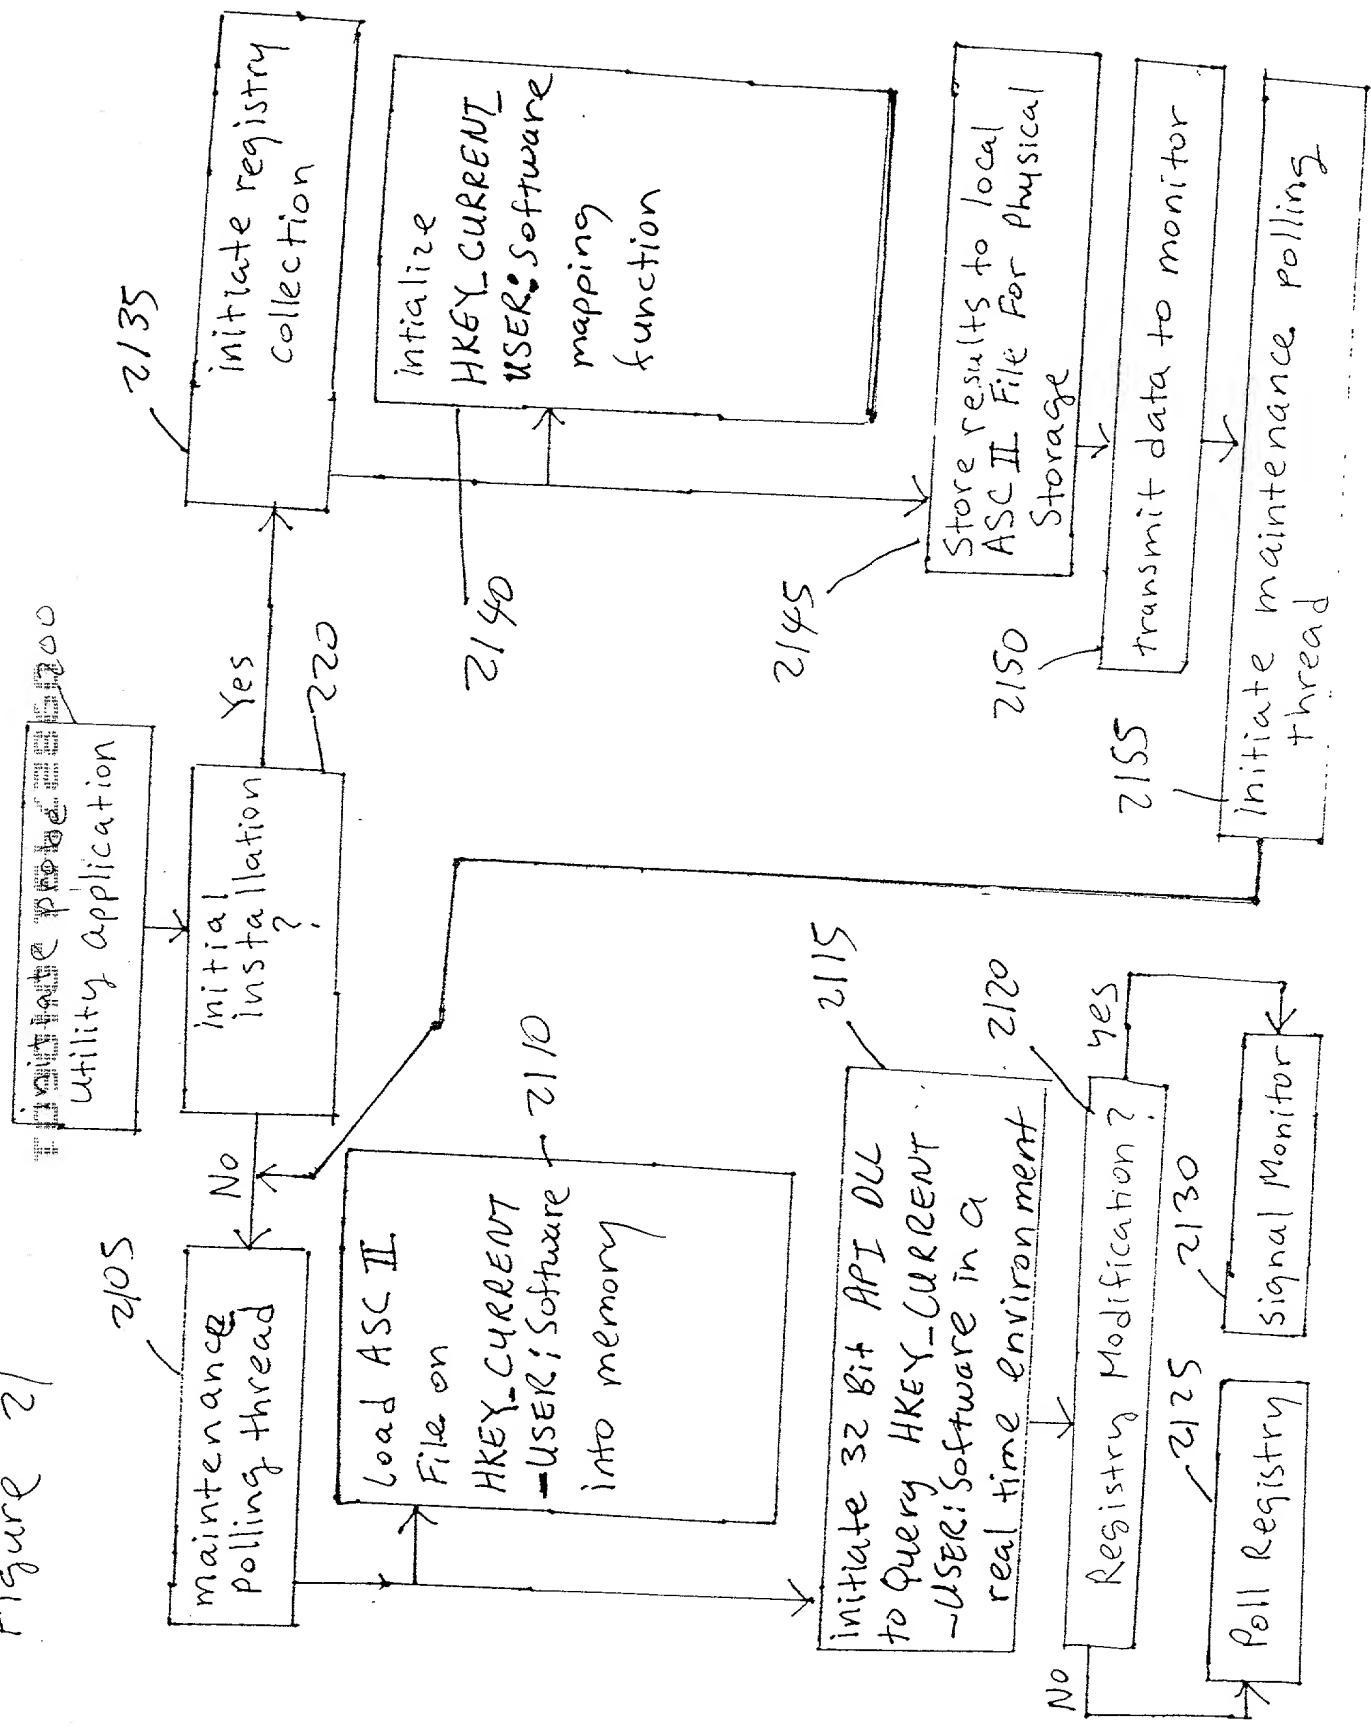

# GTI "Defense Umbrella"

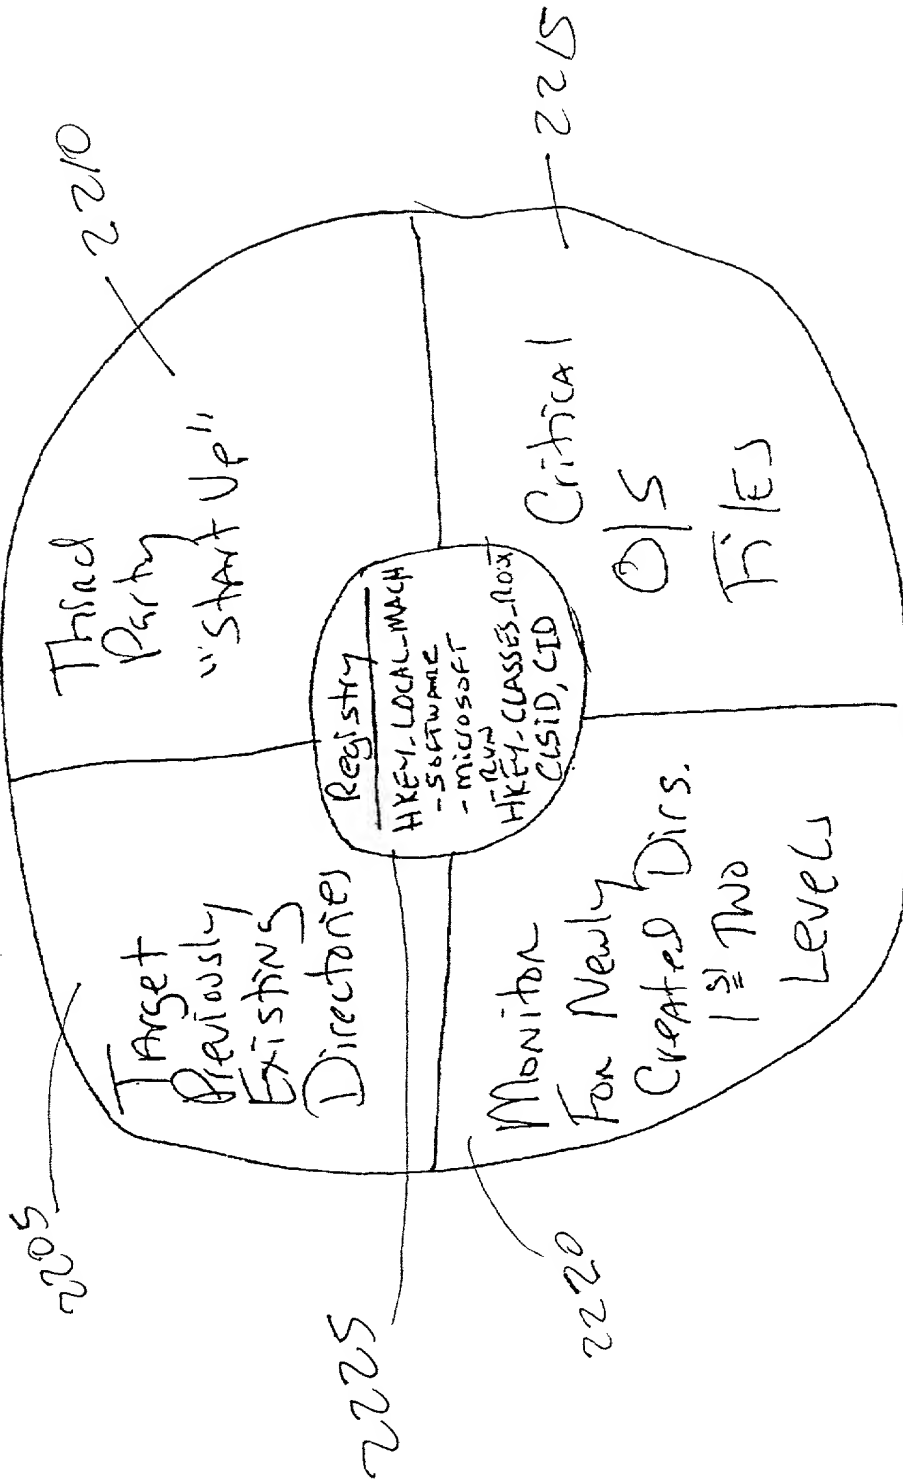

"Guarded State" of the Complete PC  
Figure 22.11

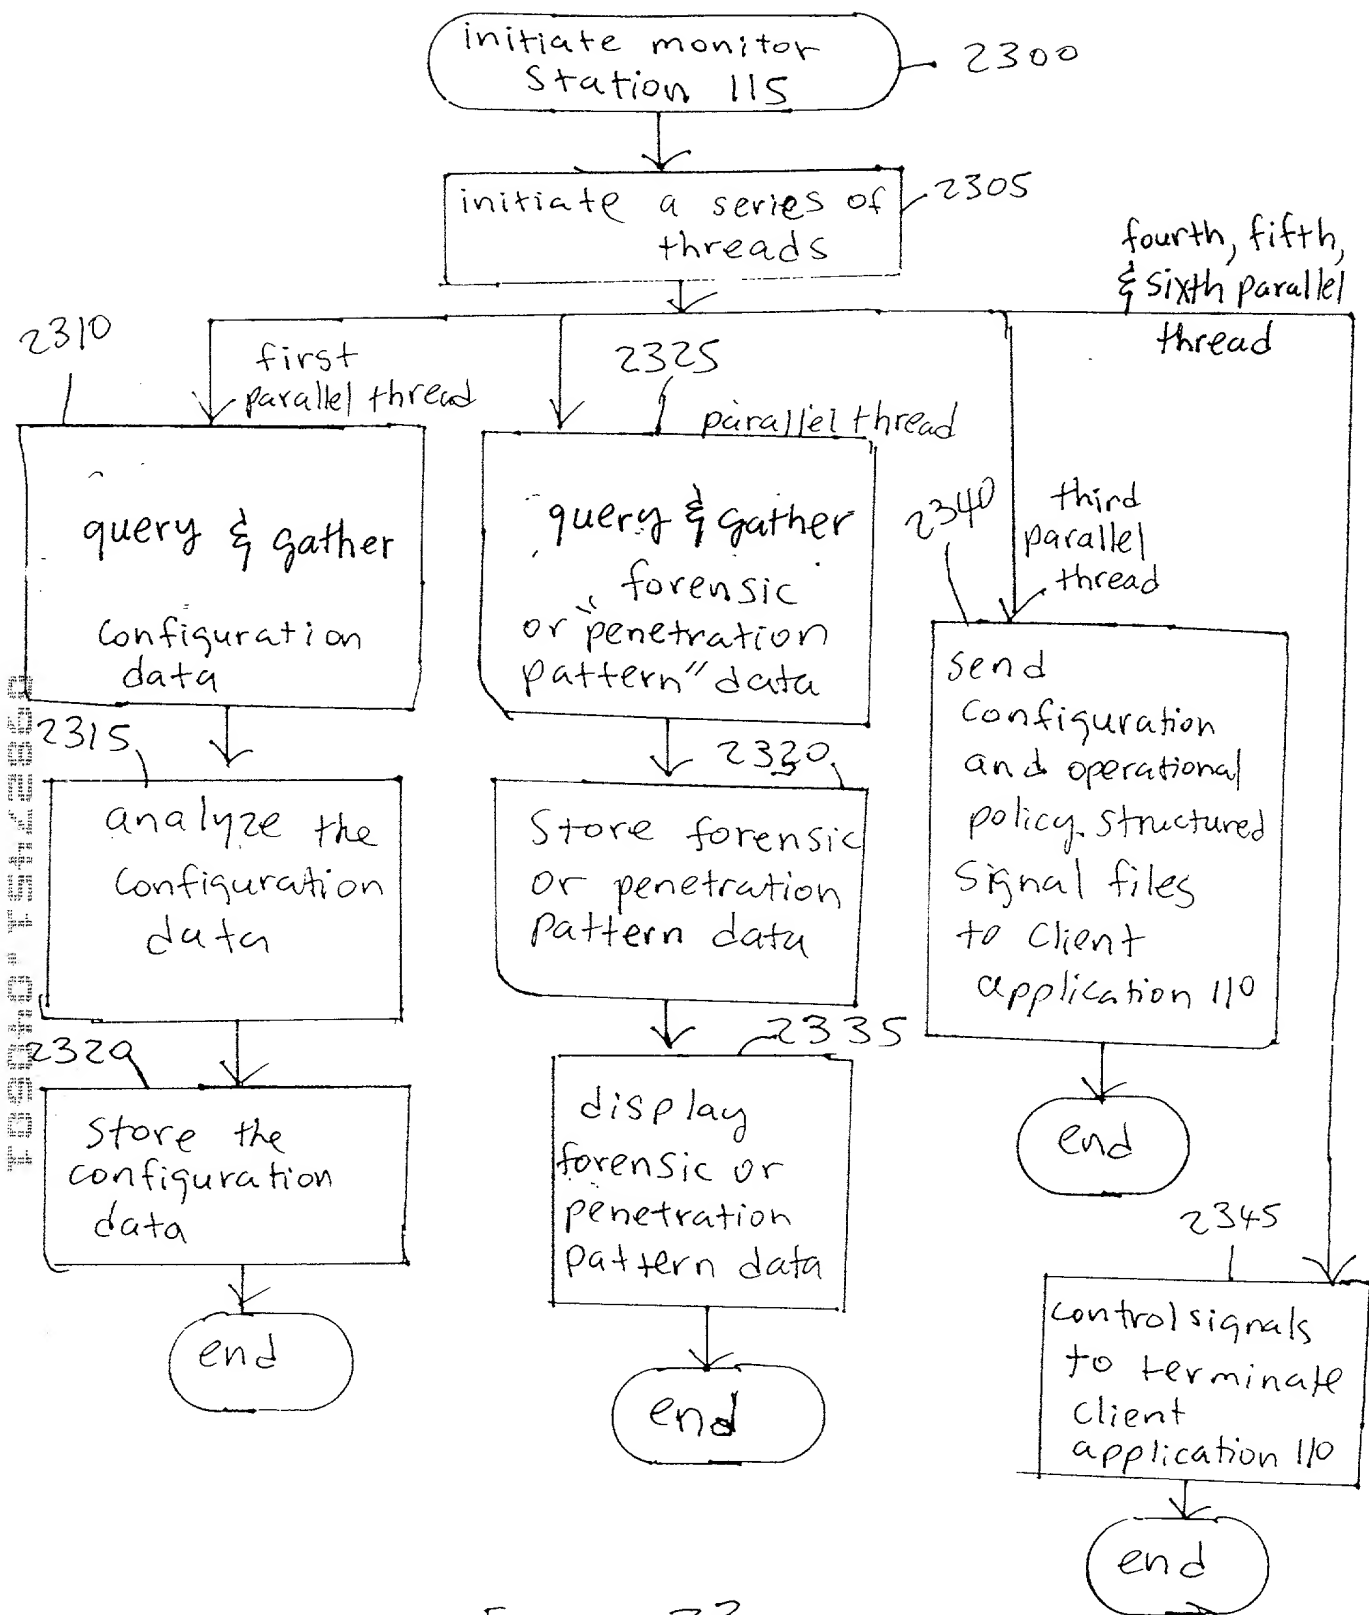


Figure 23

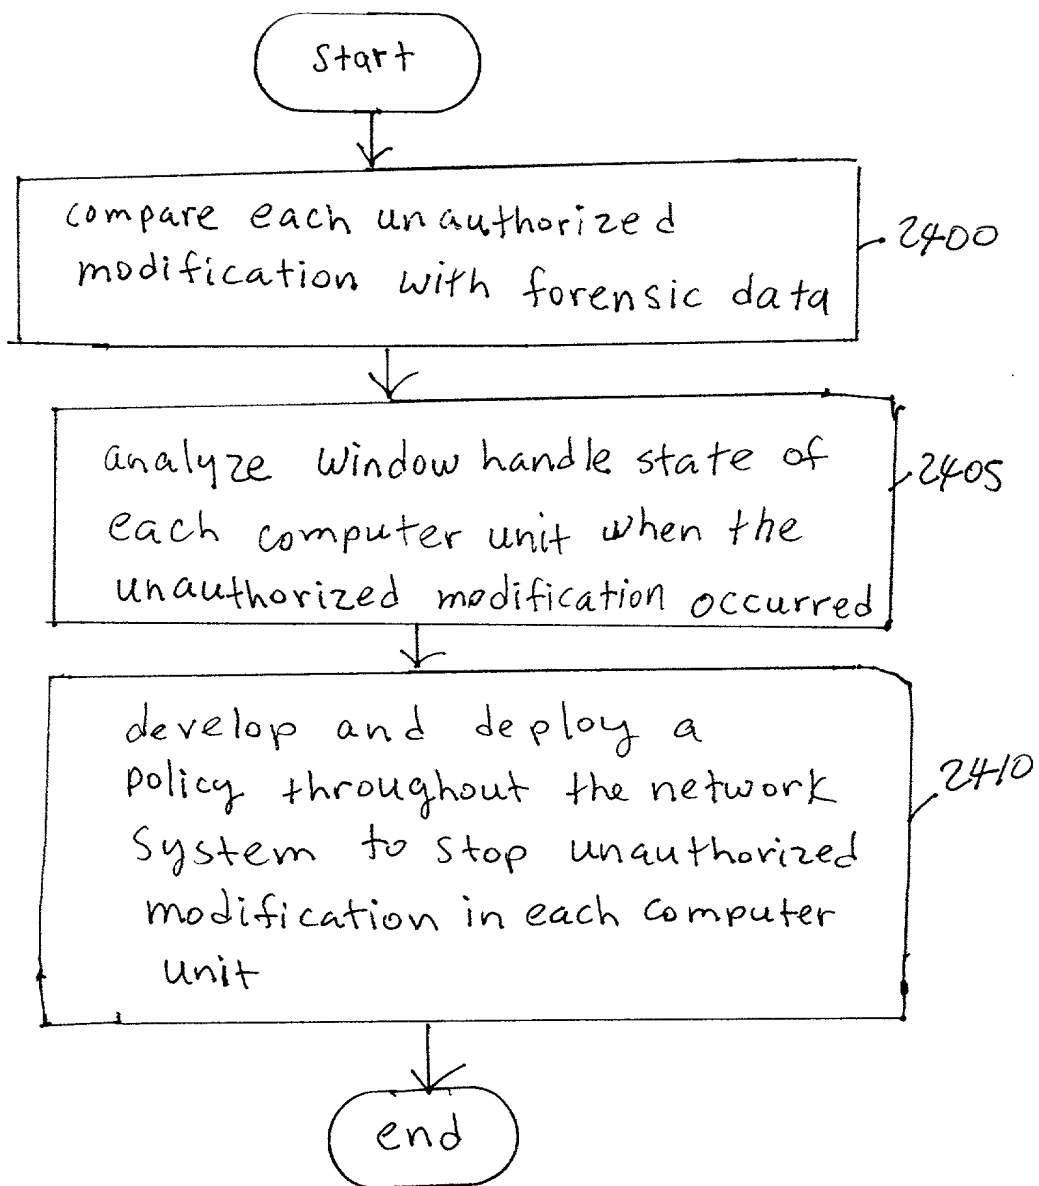


Figure 24